

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner
US Department of Commerce
United States Patent and Trademark
Office, PCT
2011 South Clark Place Room
CP2/5C24
Arlington, VA 22202
ETATS-UNIS D'AMERIQUE
in its capacity as elected Office

Date of mailing (day/month/year) 07 February 2001 (07.02.01)	
International application No. PCT/GB00/02243	Applicant's or agent's file reference P0434
International filing date (day/month/year) 09 June 2000 (09.06.00)	Priority date (day/month/year) 09 June 1999 (09.06.99)
Applicant BEALE, Mark, Ivor, John	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:03 January 2001 (03.01.01)☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Pascal Piriou

Telephone No.: (41-22) 338.83.38

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 December 2000 (14.12.2000)

PCT


(10) International Publication Number
WO 00/75765 A1

- (51) International Patent Classification⁷: **G06F 3/023, 3/033**
- (21) International Application Number: **PCT/GB00/02243**
- (22) International Filing Date: **9 June 2000 (09.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
9913283.9 9 June 1999 (09.06.1999) GB
9924342.0 15 October 1999 (15.10.1999) GB
- (71) Applicant (for all designated States except US):
MALVERN SCIENTIFIC SOLUTIONS LIMITED
[GB/GB]; 137 Church Street, Malvern, Worcestershire
WR14 2AN (GB).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **BEALE, Mark, Ivor, John** [GB/GB]; 137 Church Street, Malvern, Worcestershire WR14 2AN (GB).
- (74) Agent: **JACKSON, Derek, Charles**; Derek Jackson Associates, The Old Yard, Lower Town, Claines, Worcester WR3 7RY (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: **COMMUNICATION SYSTEM AND METHOD**

(57) Abstract: A communication system comprises means defining a communication region, such as a touch-pad (151), having associated therewith a plurality of symbols (155) or the like and being responsive to a user-controlled pointing device whereby a desired symbol or the like can be selected by movement of the pointing device in a predetermined direction within the region (151).

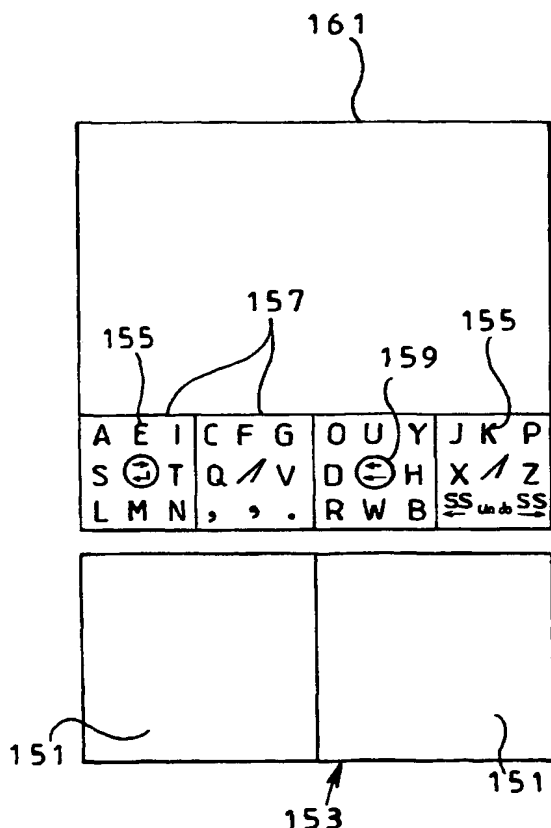

WO 00/75765 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*

COMMUNICATION SYSTEM AND METHOD

This invention relates to a communication system and method of communicating which may be employed, for example, for the entry of symbols such as text and/or other symbols by means other than a keyboard and/or for the entry of data, such as for controlling electronic equipment, and for the output of symbols and/or data.

The "QWERTY" keyboard is the most widely used symbol/text entry system. However, for certain applications its many keys, often over 100, occupy an inconveniently large area or, in the alternative, are inconveniently small for ready access by fingers or another pointing device. A mobile user can additionally find the need for a horizontal support surface at a convenient height problematic.

Many other symbol/text entry systems have been developed, including some for single-handed use. None has acquired a degree of popularity on the scale of the QWERTY keyboard. Some require the user to remember complex keystrokes or combinations of keystrokes which make them difficult to use. Such known symbol/text entry systems are particularly difficult for use by the casual user where a small number of relatively simple movements is to be desired. Speed of symbol/text entry is important to both novice and skilled users.

It is therefore an object of the present invention to provide a communication system and method which overcomes or at least reduces the disadvantages of known systems.

According to one aspect of the present invention there is provided a communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like (such as data items) and being responsive to a user-controlled pointing device

- 2 -

whereby a desired symbol or the like can be selected by movement of the pointing device in a predetermined direction within the region.

5 According to another aspect of the present invention there is provided a method of communication in which a plurality of symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device in a predetermined direction
10 within the region.

Thus, movement of a single pointing device in the plane of the communication region can select any one of a number of symbols.

15 A plurality of symbol entry regions may be provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction (or bearing)
20 within the region with which the desired symbol is associated.

The communication system may be in the form of a symbol entry system, such as for replacing a keyboard, or may be
25 in the form of a data entry system, such as for controlling one or more functions of electronic equipment.

An ideal direction of movement is a line from a central area of a region to a desired symbol. Movement in a
30 predetermined direction may be detected, for example, by analysing the direction (or bearing) of movement of the pointing device rather than the location thereof. Thus, in practice the location of movement need not be restricted to
35 the ideal direction, but rather may be generally parallel to the ideal direction. Such a method of analysis is particularly beneficial in that it makes the system very

- 3 -

tolerant of imprecision relating to the pointing device. Thus, the movement may be offset relative to the location of the symbol to be selected, or may have a variable length. Further the actual direction need not be precise, but may be within a tolerance which can readily be determined by the angular separation of adjacent symbols (for example about ± 22.5 degrees for eight symbols disposed about a central point). Moreover, the movement need not be linear, curved movement being accommodated by determining an average direction, for example using the start and finish points of a movement. Where a plurality of cells are provided, the mid-point of a pointing movement may be used to determine the cell to be selected. Alternatively, movement in a predetermined direction may be detected, for example, by analysing the location at which the movement intersects with a boundary of the region or other suitable boundary such as that of a touch-sensitive area.³³

In one embodiment of the invention there is a plurality of cells (for example, eight) within a single communication (symbol entry or function entry) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being selected by movement in a predetermined direction relative to the respective cell followed by continued movement in the same direction or movement at an angle thereto to select the desired symbol or the like associated with the respective cell. The cells may be provided substantially in an octagonal arrangement.

In another embodiment of the invention there is a plurality (for example, eight) communication (symbol entry or function entry) regions, each region having associated therewith a plurality of symbols (for example, four) or the like arranged in an orthogonal manner, a desired symbol or

- 4 -

the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region. The eight regions may be provided substantially in an octagonal arrangement.

In a further embodiment of the invention there are four communication (symbol entry or function entry) regions, each region having associated therewith six or eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between predetermined adjacent corners, such as along the top and bottom of each region, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. The four regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three communication (symbol entry or function entry) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. Where the three regions are intended to be operated with a user's finger, the regions may be arranged in a substantially linear manner with the central region displaced so as to accommodate the user's middle finger length.

In a further embodiment of the invention there are two communication (symbol entry or function entry) regions,

- 5 -

each region having associated therewith a plurality of symbols (for example, eight) or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

In a further embodiment of the invention there are five communication (symbol entry or function entry) regions, each region having associated therewith up to four symbols or the like arranged in a predetermined manner, for example at the corners of a square, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. The regions may arranged in a substantially linear manner. Two sets of communication regions may be provided, one for each hand. Alternatively, or additionally, two sets of communication regions may be arranged substantially parallel to each other for alternative symbol or the like entry. Further communication regions may be provided if desired.

One or more further regions may be provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions. For example, a plurality of further regions may be provided around the periphery of the first-mentioned regions and/or a single further region may be provided centrally of the first-mentioned regions.

Means may be provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to

- 6 -

the first-mentioned symbols or the like of each region by tapping the area within the desired region.

Means may be provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols. For example the speed of movement (slow or fast) or a combination of movements may be used. Combined movements may include a linear movement with a dwell at the beginning and/or end thereof (for example to select upper case letters), a linear movement in a first direction followed by one or more further linear movements reversing the preceding movement, two sequential linear movements either at right-angles to each other or at another predetermined angle to each other (for example to mimic all or part of the desired symbol or the like). It should be noted such different forms of movement do not constitute tracing out the symbol shape: only a small number of simple movements need to be remembered.

The region or regions may be provided on a touch-sensitive pad or screen or may be displayed on a screen with symbols or the like being selected by way of a remote pointing device (such as a computer mouse or trackball or an optical tracking device). The symbols may be provided on the region or regions, may be positioned adjacent (for example immediately above or below) thereto, or may be displayed on or adjacent the region or regions only if required by the user. Alternatively, the region or regions may be provided on sheet material in order that a user can indicate each desired symbol or the like in turn.

According to a further aspect of the present invention there is provided a communication (symbol output) system comprising means defining a communication (symbol output) region having associated therewith a plurality of symbols or the like, and means movable within the region whereby a

- 7 -

desired symbol or the like can be indicated by movement of the movable means in a predetermined direction or at a predetermined location within the region.

5 According to a further aspect of the present invention there is provided a method of communication (symbol output) in which a plurality of symbols or the like are associated with a communication (symbol output) region and a desired
10 symbol or the like is indicated by movement of a movable means in a predetermined direction or at a predetermined location within the region.

The movable means may comprise a visual means and/or a tactile means.

15

A plurality of symbol entry regions may be provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the
20 pointing device in a predetermined direction within the region with which the desired symbol is associated.

A separate movable means may be provided for each region, for example a pin which is movable in orthogonal and/or
25 diagonal directions. Alternatively, the movable means may be provided at each symbol or the like location, such as an extendable pin or a piezo device.

In one embodiment of the invention there are eight
30 communication (symbol output) regions, each region having associated therewith a plurality of symbols (for example, four) or the like arranged in an orthogonal manner, a desired symbol or the like being indicated by movement of the movable means within the region having the desired
35 symbol or the like associated therewith in a predetermined orthogonal direction. The eight regions may be provided substantially in an octagonal arrangement.

- 8 -

In another embodiment of the invention there is a plurality of cells (for example, eight) within a single communication (symbol output) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being indicated by movement of the movable means in a predetermined direction relative to the respective cell followed by continued movement in the same direction in the same direction or movement at an angle thereto to indicate the desired symbol or the like within the respective cell. The eight cells may be provided substantially in an octagonal arrangement.

In a further embodiment of the invention there are four communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction. The four regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being indicated by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction.

Means may be provided for indicating further symbols or the like by employing a combination of movements of the movable

- 9 -

means. Combined movements may include a linear movement with a dwell at the beginning and/or end thereof, a linear movement in a first direction followed by a further linear movement in the opposite direction, two sequential linear movements either at right-angles to each other or at another predetermined angle to each other (for example to mimic all or part of the desired symbol or the like).

The present invention can be used for communication (symbol entry) with a computer and like equipment, mobile telephones including WAP telephones, televisions (whether interactive or not), alarm clocks, audio systems for vehicles and domestic use and the like.

For a better understanding of the present invention and to show more clearly how it may be carried into effect reference will now be made, by way of example, to the accompanying drawings in which:

Figure 1 is a diagrammatic illustration of one embodiment of a communication (symbol entry) system and method according to the present invention;

Figure 2 is a diagrammatic illustration of another embodiment of a communication (symbol entry) system and method according to the present invention;

Figures 3a, 3b and 3c are a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a development of that shown in Figure 2;

Figures 4a and 4b are a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a development of that shown in Figure 1;

- 10 -

Figure 5 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a development of that shown in Figures 4a and 4b;

Figures 6a, 6b and 6c are a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a development of that shown in Figures 3a, 3b and 3c;

Figures 7a and 7b are a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a development of that shown in Figure 2;

Figure 8 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a modification of that shown in Figures 3a, 3b and 3c;

Figure 9 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a modification of Figures 4a and 4b;

Figure 10 is a diagrammatic illustration of a modification of the communication (symbol entry) system and method of Figure 9;

Figure 11 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is a modification of that shown in Figures 3a, 3b and 3c;

Figure 12 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method

- 11 -

according to the present invention and adapted for two-handed use;

Figure 13 is a diagrammatic illustration of one embodiment of a communication (symbol output) system and method according to the present invention;

Figure 14 is a diagrammatic illustration of an embodiment of a communication system according to the present invention in the form of a vehicle audio system;

Figure 15 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is similar to that shown in Figure 3; and

Figure 16 is a diagrammatic illustration of an embodiment of a communication (symbol entry) system and method according to the present invention which is similar to that shown in Figure 15.

Conventional keyboards are operated by pressing one or more keys at one or more specific locations. The keys are not triggered until a specific pressure is exceeded or a predetermined proximity is attained. Each key generates a single specific output, although the output may be modified in dependence on the use of further keys, such as a "shift", "alt" or "caps lock" key.

In contrast to a conventional keyboard, the communication (symbol entry) system shown in Figure 1 comprises an octagonal arrangement of eight trapezoidal regions 1 which is best suited to use by way of a pointing device in the form of a movable cursor 3, but could alternatively be a finger on a touch pad, or a finger movement in space or a printed sheet of card or the like for manual use. The cursor 3 may be operated by a number of devices such as a

- 12 -

mouse or track-ball, touch-pad or head-controlled optical tracker. Substantially at the centre of the regions 1 is a central octagonal region 5 which can be used for initiating symbol entry and indicating completion of a symbol entry cycle.

The cursor 3 is moved from the central region 5 into one of the trapezoidal regions 1 to activate a number of symbols 7. For example, the cursor may be moved up to activate the letters A, B, C and D. The cursor 3 is then moved out of the activated region 1 in a predetermined direction (bearing) to select the desired letter, for example horizontally to the right to select the letter B. The cursor 3 is then returned to the central region 5 to initiate selection of the next symbol. The eight regions 1 and four (orthogonal) directions for each region enable any one of thirty-two symbols 7 to be readily selected.

Around the periphery of the octagonal arrangement of regions 1 can be provided a number of mode change regions 9 which can be used, for example where the regions 1 are displayed on a computer or like screen, to change the nature of the regions displayed so as to provide a different set of symbols 7 such as to change between lower case and upper case, to display numerals or control domestic or other appliances. Thus, the user can toggle between a number of different sets of symbols.

The communication (symbol entry) system shown in Figure 2 comprises a quadrilateral (or orthogonal) arrangement of regions 11 provided on a touch-sensitive pad 13 (such as that found on many portable computers) or a touch-sensitive screen and which may be operated by a pointing device in the form of a single finger or pointing stick. Each region 11 has eight symbols 15 associated with it to allow selection of any one of those symbols by movement of the pointing device in the appropriate direction. When

- 13 -

operated by finger, although only a single finger should touch the pad 13 at any one time, one to four fingers can actually be used for text entry. Where four fingers are to be used, one for each region, a horizontal layout of the four regions 11 is preferred to the quadrilateral arrangement shown in Figure 2. The position of a finger within a region 11 is not critical and, although the direction of movement needs to distinguish between adjoining directions, the precise direction is not critical and operation of the system is very user-friendly.

A further option when employing a touch-sensitive pad is the use of "hover film" or the like which allows the user to rest one or more fingers on a surface without triggering the touch-sensitive pad unless a predetermined downward pressure is applied to the hover film. Such an arrangement is particularly convenient for applications where there is no other form of support for the fingers being used. The hover film may comprise an elastomeric film stretched about 1 mm above the touch-sensitive pad or may comprise a pressure-sensitive sensor within the touch-sensitive pad itself. A touch-sensitive pad has the advantage that it is continuous, flat and smooth and has no moving parts. Such a pad is easy to clean and can readily be re-configured to adapt to changing fashion in consumer goods.

Clearly, the use of a touch-sensitive pad allows further possibilities in addition to symbol entry. For example, the touch-sensitive pad can be used for conventional mouse cursor control, with either a region of the pad being dedicated to mouse control, or by providing means to toggle between symbol entry and mouse control, this being a straightforward task requiring no inventive capability. Alternatively, the touch-sensitive pad can have other dual or multiple functions such as the ability to toggle to standard QWERTY text entry and/or to allow handwritten input.

- 14 -

It should be noted the touch sensitive pad does not need to be integral with any apparatus with which it communicates, such as computer or mobile telephone, and can communicate by way of a remote link such as wire, radio or infra-red.

5 This facilitates location of the touch-sensitive pad in a convenient position and/or orientation. However, a preferred location for the touch sensitive pad is adjacent to a display in order that the user is oriented to the display and can map intuitively between the display and the

10 touch sensitive pad.

The use of an octagonal or quadrilateral layout of regions allows for intuitive and physiologically convenient movements (swiping) in up-down, side-to-side or diagonal

15 directions without the need for undue precision. In the embodiments of both Figure 1 and Figure 2 the symbol selected is dependent on the combination of the location of a movement of a pointing device and the direction of that movement. While other numbers of regions and directions

20 could be used, the use of eight or four locations with either four or eight directions provides for very user-friendly and intuitive movements while at the same time providing a sufficient number of symbols for a useful text entry system. Additional functions and/or symbols can be

25 obtained by allocating a key to change the symbols associated with a region, for example to upper case, numerals, or to control other functions (for example domestic appliances such as televisions and/or hifi systems). To assist in orientating the pointing device,

30 the surface of the touch-sensitive pad or screen (or other symbol entry surface or means) may be provided with tactile means, such as vertical and/or horizontal grooves.

The symbols may provide for the letter-for-letter entry of

35 text or alternatively may be used as the input for a text input system involving disambiguation such as that described in WO-A-9833111. The system may incorporate an

- 15 -

audio or video/visual response or output corresponding for example either to the contact and movement of the pointing device or to the symbol or symbols entered in order to provide the user with feedback that the desired symbol or symbols has or have been selected. Additionally, the entry of one or more symbols may be used as part of a prediction means for a letter, word or the like in known manner. Moreover, the communication (symbol entry) system and method according to the invention may incorporate a spell checker in order to eliminate typographical errors resulting, for example, from selecting the wrong symbol in any particular region (such as by selecting the incorrect adjacent direction of movement) or from selecting the wrong region, but making the movement in the correct direction.

The symbols may also be used to generate macros or strings of characters, for example to control the operating mode of a mobile telephone.

The communication (symbol entry) system shown in Figures 3a, 3b and 3c is a development of that shown in Figure 2. As shown in Figures 3a, 3b and 3c there are three regions provided on a touch-sensitive pad 23 (or, alternatively, each region may comprise a touch sensitive pad), each of which regions may be operated by a pointing device in the form of a separate finger. To facilitate operation of the communication (symbol entry) system the central region is displaced relative to the outer regions to accommodate the longer middle finger. Each region 21 has eight symbols associated with it around the periphery thereof in a predetermined arrangement at the corners of a square and substantially midway between adjacent corners to allow selection of any one of those symbols by movement of a finger in the appropriate direction and a ninth symbol 27 which is selected by a tapping motion within the appropriate region 21. Although the arrangement of symbols could be altered, in the illustrated embodiment as shown in

- 16 -

Figure 3a lower case letters are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal). Upper case letters are selected by holding a finger within the required region for a predetermined time at the beginning and/or end of a letter selection movement or by determining the speed of movement (e.g. slow for upper case, fast for lower case). Further symbols are selected as shown in Figure 3b by a predetermined right-angled swiping movement involving a combination of an up or down movement followed by a sideways movement or vice versa. Still further symbols as shown in Figure 3c are selected by a swiping movement in a predetermined direction followed by a further swiping movement reversing the first movement (that is a back-and-forth movement).

The use of three regions 21, allowing three finger operation, is a good compromise as regards size and ease of operation. The user's thumb and fourth finger can act as supports for the three remaining fingers and maintain the three remaining fingers just above the respective region. The eight directions of movement facilitate reliable and convenient symbol selection, combining a sufficient number of alternatives while avoiding a need for unrealistic precision. The ninth "tap" movement provides an intuitive selection for a space and permits selection from sufficient symbols to define the entire alphabet with only three regions. The selection of upper case letters by a swiping movement followed by a dwell is simple and intuitive to use. The right-angle movements of Figure 3b and the swipe and return movements of Figure 3c are simple and efficient to use (and are readily detected) and avoid the need to toggle between different modes in order to select further sets of symbols.

The communication (symbol entry) system shown in Figures 4a and 4b is a development of that shown in Figure 1. As

- 17 -

shown in Figures 4a and 4b there is a single region having marked thereon eight rectangular cells 31 provided on a touch-sensitive pad 33 or screen such as the face of a watch or the like, which cells may be operated by a suitable pointing device such as a pointing stick or finger. As with the embodiment of Figure 1, the eight cells 31 are generally arranged in the form of an octagon. Each cell 31 has three symbols 35 associated with it to allow selection of any one of those symbols by movement of the pointing device firstly in the appropriate direction for that cell 31 and secondly either further in a radial direction for the middle symbol or, for the outer symbols, in the circumferential direction of the required symbol associated with the desired cell. Although the arrangement of symbols could be altered, in the illustrated embodiment as shown in Figure 4a lower case letters are selected by a simple straight or right-angle swiping movement in the appropriate direction. Upper case letters are selected by holding the pointing device stationary at the beginning and/or end of the swiping movement for a predetermined time or by detecting a relatively slow movement. By tapping anywhere in the octagon it is possible to toggle between the first set of symbols and a second set of symbols as shown in Figure 4b, and an individual symbol from the second set can be chosen in the same way as described above in respect of Figure 4a.

The communication (symbol entry) system shown in Figure 5 is a modification of that shown in Figures 4a and 4b and can advantageously be used where there is sufficient space for two regions in the form of two touch-sensitive pads 41 or screens. On each pad (region) 41 there are defined eight rectangular cells 43 arranged generally in the form of an octagon and in operation the two touch-sensitive pads of Figure 5 are used in the same way as the single pad of Figures 4a and 4b, except there is no need to toggle between two sets of symbols 45.

- 18 -

It should be noted the alphabetic layouts of Figures 4 and 5 (and the other embodiments described herein) can be replaced by alternative layouts, for example employing the relative frequency of use of the various letters as a criterion for determining symbol location.

The communication (symbol entry) system shown in Figures 6a, 6b and 6c is a modification of that shown in Figures 3a, 3b and 3c. As with Figures 3a, 3b and 3c, there are three regions 51 provided on a touch-sensitive pad 53 (or three separate touch-sensitive pads) or screen, each of which regions 51 may be operated by a pointing device in the form of a separate finger. As in Figure 3, the central region in Figure 6 is displaced (offset) to accommodate the longer middle finger. Each region 51 in Figure 6a has eight symbols 55 associated with it and disposed around the periphery thereof in a predetermined arrangement at the corners of a square and substantially midway between adjacent corners to allow selection of any one of those symbols by movement of a finger in the appropriate direction and a ninth symbol 57 which is selected by a tapping motion within the appropriate region. As with Figure 3a, in the embodiment of Figure 6a lower case letters are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal) and upper case letters are selected by additionally holding the finger within the selected region 51 for a predetermined time at the end of a letter selection movement. Further symbols 59 are selected as shown in Figure 6b either by holding the finger stationary for a predetermined time at the beginning of a symbol selection movement or by making a predetermined multidirectional swiping movement, such as those illustrated in the upper part of the right-hand region of Figure 6b in which the movement at least partly mimics the shape of the symbol concerned. Still further symbols 59 as shown in Figure 6c are selected by a swiping movement in a predetermined direction followed by a further

- 19 -

swiping movement reversing the first movement (that is a back-and-forth movement) and by more complex movements mimicking the shape of the symbol concerned. Such complex movements may mimic symbols such as %, & and @ or may permit a sketch to be made.

The communication (symbol entry) system shown in Figures 7a and 7b is a development of that shown in Figure 2. As shown in Figures 7a and 7b there are four regions 61 provided on a touch-sensitive pad 63 or screen and arranged in a quadrilateral, each of which regions 61 may be operated by a pointing device in the form of a single finger or pointing stick. Each region 61 has eight symbols 65 associated with it and disposed around the periphery thereof (for example at the corners of a square and midway between adjacent corners) to allow selection of any one of those symbols by movement of a finger or the like in the appropriate direction and a ninth symbol 67 which is selected by a tapping motion within the appropriate region. Although the arrangement of symbols could be altered, in the illustrated embodiment as shown in Figure 7a lower case letters are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal), while upper case letters are selected by holding a finger or the like within the desired region 61 for a predetermined time at the end of a symbol selection movement. Further symbols 69 are selected as shown in Figure 7b by holding a finger or the like within the desired region for a predetermined time at the start of a symbol selection movement and by more complex movements mimicking the shape of the symbol concerned. Such complex movements may mimic symbols such as £ and \$ or may permit a sketch to be made.

The communication (symbol entry) system shown in Figure 8 is a modification of that shown in Figures 3a, 3b and 3c. There are three regions 71 provided on a touch-sensitive

- 20 -

pad 73 (or, alternatively, each region may comprise a touch sensitive pad), each of which regions may be operated by a pointing device in the form of a separate finger. To facilitate operation of the symbol entry system the central region may be displaced (not shown in Figure 8) relative to the outer regions to accommodate the longer middle finger. Each region 71 has eight symbols 75 associated with it around the periphery thereof in a predetermined arrangement at the corners of a square and substantially midway between adjacent corners to allow selection of any one of those symbols by movement of a finger in the appropriate direction and a ninth symbol 77 which is selected by a tapping motion within the appropriate region 71. Although the arrangement of symbols could be altered, in the illustrated embodiment as shown in Figure 8 the inner symbols are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal). The outer symbols are selected by a swiping movement in a predetermined direction followed by a further swiping movement reversing the first movement (that is a back-and-forth movement). Upper case letters are selected by holding a finger within the required region for a predetermined time at the beginning or end of a letter selection movement (for example a dwell at the beginning of a movement for the inner symbols and a dwell at the end of a movement for the outer symbols) or by determining the relative speed of movement of the pointing device as described hereinabove. Space, backspace and new line symbols are selected by a tap within the appropriate region, while the # symbol is reserved for toggling between the illustrated symbols and a further set of symbols or for toggling a further function such as to activate speech output.

The communication (symbol entry) system shown in Figure 9 is a modification of that shown in Figures 4a and 4b. In the embodiment of Figure 9 there is one region defining

- 21 -

eight cells 81 provided on a touch-sensitive pad 83 or screen such as the face of a watch or the like, which cells may be operated by a suitable pointing device such as a pointing stick or finger. As with the embodiment of Figures 4a and 4b, the eight cells 81 are generally arranged in the form of an octagon. Each cell 81 has two sets of three symbols 85 associated with it, the inner set being selected by a simple swiping movement in the direction of the appropriate cell and the outer set being selected by a dwell of predetermined duration at the beginning of the swiping movement. The desired symbol is then selected by a radial swiping movement for the middle symbol or, for the outer symbols, by a swiping movement in the appropriate circumferential direction of the required symbol after movement towards the desired cell. A single tap anywhere in the octagon represents a space, while a double tap represents a backspace.

Figure 10 is a simplification of the embodiment of Figure 9 in that only the central symbol of most sets is shown to remind the user of the symbols of each set. The arrangement of Figure 10 improves visibility of the symbols displayed where the overall symbol entry area is relatively small.

It should be noted the number of symbols in each set could be increased from three to four if two symbols can be selected by the radial swiping movement, the outer symbol being selected by a single outward radial movement and the inner symbol being selected by a radially inward swiping movement after the outward movement. In this way the eight separate cells can be used to enter up to sixty-four symbols.

The communication (symbol entry) system shown in Figure 11 is a modification of that shown in Figures 3a, 3b and 3c. There are four regions 91 provided on a touch-sensitive pad

- 22 -

93 (or, alternatively, each region may comprise a touch sensitive pad), each of which regions may be operated by a pointing device in the form of a separate finger. Each region 91 has six symbols 95 associated with it around the periphery thereof in a predetermined arrangement at the corners of a square and at the top and bottom substantially midway between adjacent corners to allow selection of any one of those symbols by movement of a finger in the appropriate direction and a seventh symbol 97 which is selected by a tapping motion within the appropriate region 91. The avoidance of horizontal movements can be more ergonomically efficient in certain circumstances. Although the arrangement of symbols could be altered, in the illustrated embodiment as shown in Figure 11 most lower case letters (the inner symbols) are selected by a simple swiping movement in the appropriate direction (up, down or diagonal). The outer symbols are selected by a swiping movement in the desired direction followed by a movement in the reverse direction. Upper case letters are selected by holding a finger within the required region for a predetermined time at the beginning and/or end of a letter selection movement. Further symbols, such as space, backspace and new line, are selected by tapping within the appropriate region 91.

The communication (symbol entry) system shown in Figure 12 is adapted for use by two hands and comprises an arrangement of two rows of five regions 101 for each hand provided on a touch-sensitive pad 103 or a touch-sensitive screen and which may each be operated by a pointing device in the form of a different finger. Each region 101 in the lower rows has four symbols 105 (primarily letters in the illustrated embodiment) associated with it to allow selection of any one of those symbols by movement of the pointing device in the appropriate up, down or sideways direction, while each region 101 in the upper rows generally has two symbols 105 (primarily numerals and the

- 23 -

usual PC function keys) associated with it to allow selection of any one of those symbols by movement in the appropriate up or down direction. Further regions 107 may be provided for additional functions such as shift and control. Such further regions 107 may comprise conventional keys and/or switches. The arrangement of Figure 12, by employing both hands, provides a particularly simple (and therefore fast) set of finger movements for symbol entry.

Thus the present invention is able to provide a compact, low-cost, user-friendly symbol/text entry system which is suitable for use in a wide range of applications, including personal computer access and text input for mobile computer systems, numeric input for dialling with mobile telephones and text entry. If desired, the symbol entry system and method may be adapted to employ the user's thumb to enter a space. An additional region may be provided in an area where the thumb would naturally fall and can either enter a space when the thumb is urged against the touch-sensitive pad or, when the thumb is used as a support, to enter a space when the thumb is lifted from the pad.

Figure 13 illustrates an embodiment of a communication (symbol output) system and method according to the present invention in which a linear array of symbol output regions 111 are arranged on an output pad 113 or the like. Each output region 111 is in the form of an octagonal gate array which allows movement of a symbol indicating pin 115 in orthogonal and diagonal directions in order to indicate different symbols 117. Movement of the pins 115 may be controlled by any suitable linear actuating means. Thus movement of a single one of the pins 115 in a predetermined direction can be used to indicate a single symbol 117 and a sequence of such movements can be used to indicate a sequence of symbols. The sequence of symbols can be identified visually or can be identified by movement

- 24 -

against a user's skin (such as the user's fingers or the palm of a hand). As an alternative to a movable pin some form of vibrating means, such as a piezo device or an extending pin, can be located at each symbol. The embodiment of Figure 13 could alternatively be employed as a symbol input system with tactile guidance from the pins 115.

Figure 14 shows an embodiment of a communication (function or data entry) system according to the invention embodied into a radio/cassette/CD audio player 121 for a vehicle. The player 121 is only shown diagrammatically but includes a display 123 for showing the function, radio station, tape direction, track or the like selected and/or other information and a plurality of generally square regions 125, 127 and 129 for controlling the player.

In the illustrated embodiment, a left-hand region 125 is used to control volume and balance. Thus upward movement over the surface of the region 125 selects volume control, while downward movement selects balance control.

Subsequent movement (or initial movement if the required control has previously been selected or is predetermined as a default control) to the left increases the treble component by a predetermined unit amount, while movement to the left followed by a dwell at the end of the movement continues to increase the treble component for the duration of the dwell. The bass component can similarly be increased either by a predetermined unit amount with a single movement to the right, while movement to the right followed by a dwell continues to increase the bass component for the duration of the dwell.

The treble or bass component can be decreased by a predetermined unit amount by a movement in the appropriate left or right direction immediately followed by a return

- 25 -

movement in the opposite direction. Continued decrease in either the treble or the bass component can be obtained with a dwell at the end of the return movement.

5 In the illustrated embodiment a central region 127 can be used to control radio functions with movements on the surface of the region in predetermined directions being used to select various functions such as RDS, BAND, STATION or TUNING. STATION can be used, for example, in a two-
10 stage selection process with a subsequent movement in one of eight orthogonal or diagonal directions being used to select one of eight preset stations.

15 A right hand region 129 can be used to control other functions of the player such as selecting TAPE or CD and for skipping BACK or FORWARD through the tracks on the tape or CD.

20 Thus the communication (function or data entry) system shown in Figure 14 effectively allows control of an analogue function (such as volume) with a single movement on a touch-sensitive pad or the like.

25 The communication (symbol entry) system shown in Figure 15 is similar to that shown in Figures 3a, 3b and 3c. As with Figures 3a, 3b and 3c, there are three regions 131 provided on a touch-sensitive pad 133 (or three separate touch-sensitive pads) or screen, each of which regions 131 may be operated by a pointing device in the form of a separate
30 finger or a single finger. Each region 131 in Figure 15 has eight symbols 135 associated with it and displayed in an arrangement 137 adjacent to (above) each region in a predetermined configuration at the corners of a square and substantially midway between adjacent corners to allow
35 selection of any one of those symbols by movement of a finger in the appropriate direction (orthogonal or diagonal) within the region concerned corresponding to the

- 26 -

location of the desired symbol and a ninth symbol 139 which is selected by a tapping motion within the appropriate region. The provision of a separate display 137 ensures the user's finger or other pointing device does not obscure the symbols being accessed. As with Figure 3a, in the embodiment of Figure 15 lower case letters are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal) and upper case letters are selected by additionally holding the finger within the selected region 131 for a predetermined time at the beginning or end of a letter selection movement or by employing a relatively slow movement of the pointing device. The arrangements 137 of symbols can either be permanent or may be temporary, for example forming the lower part of a display 141, the temporary arrangement of symbols being activated or de-activated with a suitable movement of the pointing device or other action as will be described hereinafter.

Each of the nine contiguous sub-areas within the display area has an associated symbol and appropriate pointing direction. Each symbol may substantially fill its sub-area and can therefore be relatively large. Thus the display area is substantially filled with symbols in a close packed manner, so wasting little display area. Consequently, the symbols are clear to the user and the appropriate pointing directions are intuitive from the symbol locations.

Intermediate the regions 131 and the arrangements 137 of symbols are small touch-sensitive regions 143 having permanently marked thereon a small number of symbols which can be selected by a lateral movement of the pointing device (to select a symbol at one side of a region) or with a tapping motion (to select the central symbol). Thus, one of the small regions 143 can be used to change the selected symbols, the further symbols (in the case of symbols that are not marked permanently on the system) being displayed

- 27 -

in place of the original symbols. The display of only a single set of symbols allows the symbol display to be simple with each symbol being relatively large and with a clear direction associated with it. In this way, the symbol display is clear to the user and the appropriate pointing direction to access the symbols is also clear. Where the symbols are displayed temporarily, once the user has learnt the location of the symbols he can de-activate the symbol display 137 and consequently enlarge the general display 141 of the apparatus (such as a WAP telephone or PDA device) into which the communication system of the present invention is incorporated. As will be appreciated, provision of temporarily displayed symbols in this way allows the symbols to be changed with software and many layers of menu can be scrolled through. Different languages can be easily accommodated and layouts can be personalised by the user if desired.

The communication (symbol entry) system shown in Figure 16 is similar to that shown in Figure 15. In contrast to Figure 15, there are two regions 151 provided on a touch-sensitive pad 153 (or two separate touch-sensitive pads) or screen, each of which regions 151 may be operated by a pointing device in the form of a separate finger or a single finger. Each region 151 in Figure 16 has sixteen symbols 155 associated with it and displayed in two side-by-side arrangements 157 adjacent to (above) each region each in a predetermined arrangement at the corners of a square and substantially midway between adjacent corners to allow selection of any one of those symbols by movement of a pointing device (such as a finger) in the appropriate direction (orthogonal or diagonal) within the region corresponding to the location of the desired symbol. Symbols for the left-hand arrangement of each pair are selected by a simple swiping movement in the appropriate direction. In the case of the right-hand arrangement of each pair the relevant symbol is selected by a to-and-fro

- 28 -

(forwards and backwards) movement as indicated in the middle of the right-hand arrangement. In the case of the left-hand arrangement, a ninth symbol 159 can be selected by a tapping motion within the appropriate region. As with the embodiment of Figure 15, the provision of separate displays 157 ensures the user's finger or other pointing device does not obscure the symbols being accessed. The symbols are arranged in Figure 16 such that the most frequently used symbols are in each of the left-hand arrangements (and can therefore be accessed by a single movement) while the least frequently used symbols are in the right-hand arrangements. As with the embodiment of Figure 15, lower case letters are selected by a simple swiping movement in the appropriate direction (up, down, sideways or diagonal) and upper case letters are selected by additionally holding the finger within the selected region 151 for a predetermined time at the beginning or end of a letter selection movement or by employing a relatively slow movement of the pointing device. The arrangements 157 of symbols can either be permanent or may be temporary, for example forming the lower part of a display 161, the temporary arrangement of symbols being activated or de-activated with a suitable movement of the pointing device or other action as indicated (by the legend SS) on the right-hand arrangement of the right-hand region 151.

Thus, a user can change the selected symbols or de-activate the symbols by scrolling through the symbol sets available. The display of two simple sets of symbols allows the symbol display to be straightforward with each symbol being relatively large, but close packed. In this way, the symbol display is clear and understandable to the user while wasting little display area. Once the user has learnt the location of the symbols he can de-activate the symbol display 157 and consequently enlarge the general display 161 of the apparatus (such as a WAP telephone or

- 29 -

PDA device) into which the communication system of the present invention is incorporated.

CLAIMS

1. A communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like and being responsive to a user-controlled pointing device whereby a desired symbol or the like can be selected by movement of the pointing device in a predetermined direction within the region.

2. A communication system as claimed in claim 1, wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by movement towards the respective cell followed by further radial or circumferential movement to select the desired symbol or the like associated with the respective cell.

3. A communication system as claimed in claim 1, wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.

4. A communication system as claimed in claim 3, wherein there are eight communication regions, each region having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.

5. A communication system as claimed in claim 3, wherein there are five communication regions, each region having associated therewith a plurality of symbols or the like

- 31 -

arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

6. A communication system as claimed in claim 3, wherein there are four communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

7. A communication system as claimed in claim 3, wherein there are three communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

8. A communication system as claimed in claim 3, wherein there are two communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

9. A communication system as claimed in any preceding claim, wherein two sets of communication regions are provided.

- 32 -

10. A communication system as claimed in any preceding claim, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

11. A communication system as claimed in any preceding claim, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.

12. A communication system as claimed in any preceding claim, wherein means is provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols.

13. A communication system as claimed in claim 12, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

14. A communication system as claimed in claim 12 or 13, wherein the further symbols or the like may be selected on the basis of a combination of movements.

15. A communication system as claimed in claim 14, wherein the combination of movements comprise a curvilinear movement.

16. A communication system as claimed in claim 14 or 15, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

17. A communication system as claimed in claim 14, 15 or 16, wherein the combination of movements comprise a linear

- 33 -

movement in a first direction followed by a further linear movements reversing the preceding movement.

18. A communication system as claimed in any one of claims 14 to 17, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

19. A communication system as claimed in any preceding claim, wherein the region or regions are provided on a touch-sensitive pad or screen.

20. A method of communication in which a plurality of symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device in a predetermined direction within the region.

21. A method of communication according to claim 20, wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by movement towards the respective cell followed by further radial or circumferential movement to select the desired symbol or the like associated with the respective cell.

22. A method of communication according to claim 20, wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.

23. A method of communication according to claim 22, wherein there are eight communication regions, each region

- 34 -

having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.

24. A method of communication according to claim 22, wherein there are five communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

25. A method of communication according to claim 22, wherein there are four communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

26. A method of communication according to claim 22, wherein there are three communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

27. A method of communication according to claim 22, wherein there are two communication regions, each region having associated therewith a plurality of symbols or the

- 35 -

like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

28. A method of communication according to any one of claims 20 to 27, wherein two sets of communication regions are provided.

29. A method of communication according to any one of claims 20 to 28, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

30. A method of communication according to any one of claims 20 to 29, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.

31. A method of communication according to any one of claims 20 to 30, wherein further symbols or the like are selectable by employing a different form of movement from that required to select from the basic symbols.

32. A method of communication according to claim 31, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

33. A method of communication according to claim 31 or 32, wherein the further symbols or the like may be selected on the basis of a combination of movements.

- 36 -

34. A method of communication according to claim 33, wherein the combination of movements comprise a curvilinear movement.

5 35. A method of communication according to claim 33 or 34, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

10 36. A method of communication according to claim 33, 34 or 35, wherein the combination of movements comprise a linear movement in a first direction followed by a further linear movements reversing the preceding movement.

15 37. A method of communication according to any one of claims 33 to 36, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

20 38. A method of communication according to any one of claims 20 to 37, wherein the region or regions are provided on a touch-sensitive pad or screen.

25 39. A communication (symbol output) system comprising means defining a communication (symbol output) region having associated therewith a plurality of symbols or the like, and means movable within the region whereby a desired symbol or the like can be indicated by movement of the movable means in a predetermined direction or at a predetermined location within the region.

30 40. A method of communication (symbol output) in which a plurality of symbols or the like are associated with a communication (symbol output) region and a desired symbol or the like is indicated by movement of a movable means in
35 a predetermined direction or at a predetermined location within the region.









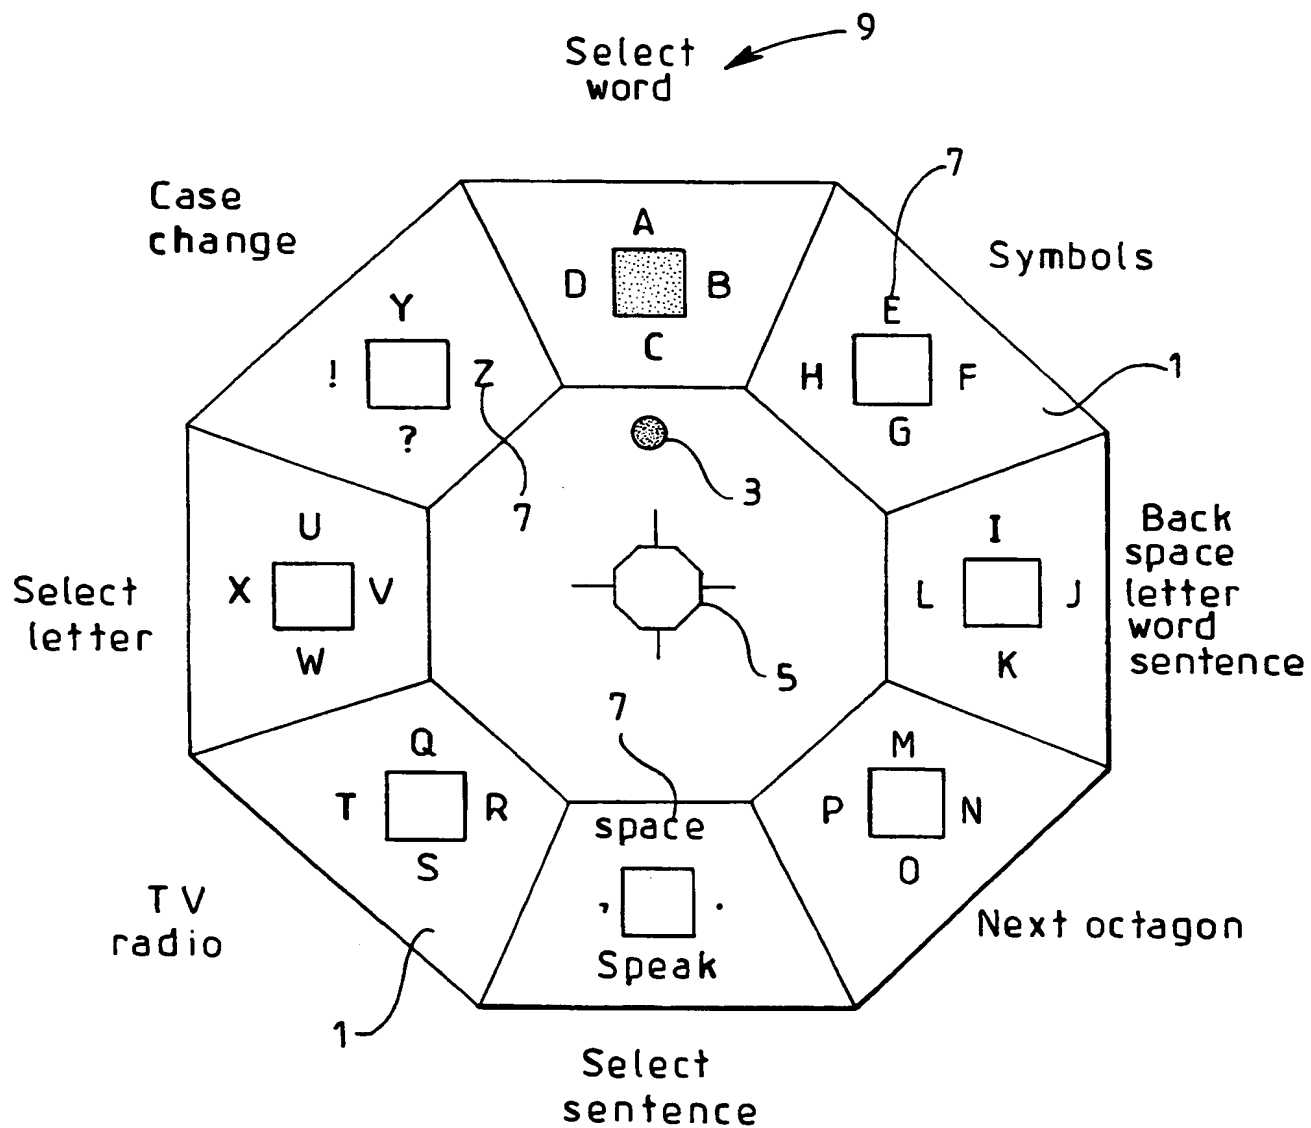


FIG 1




2 / 7

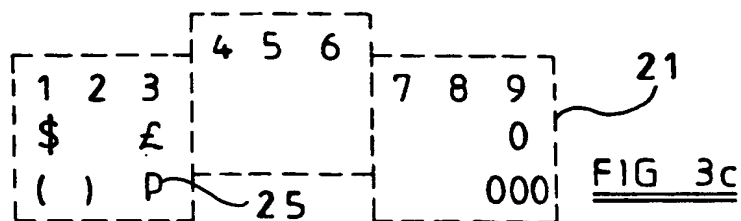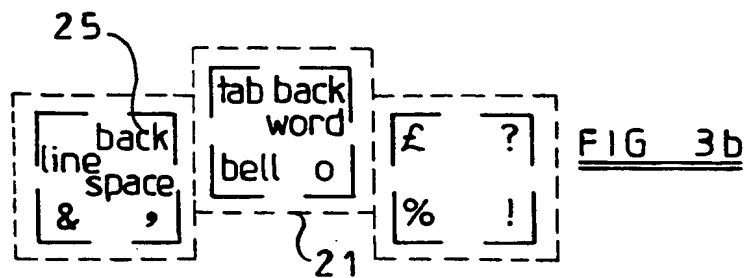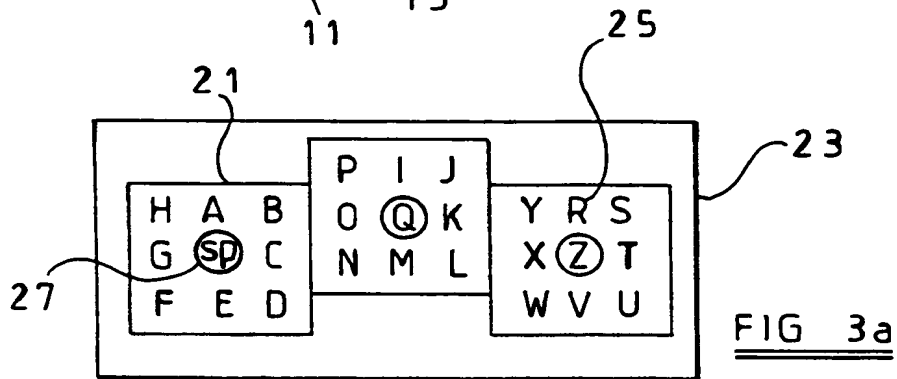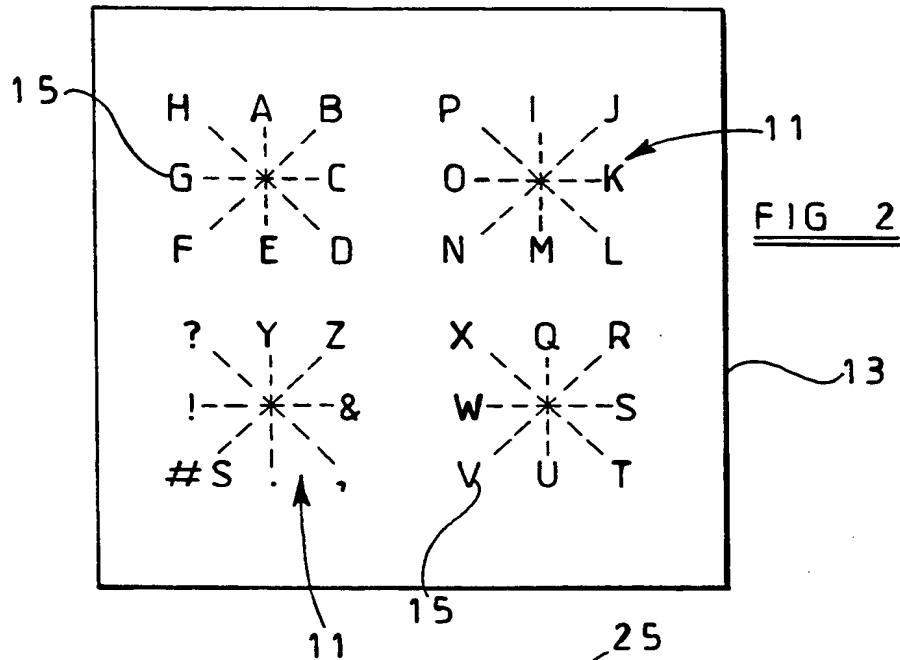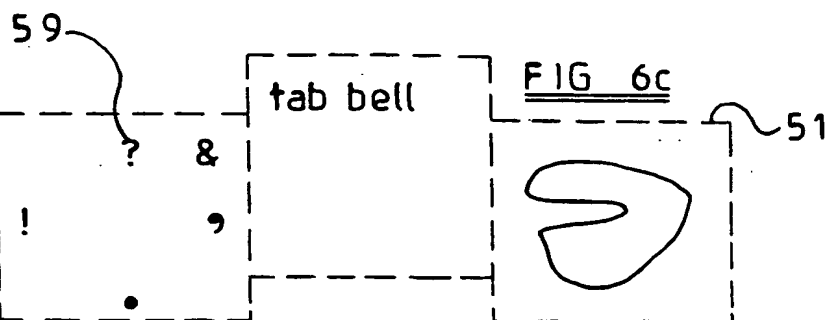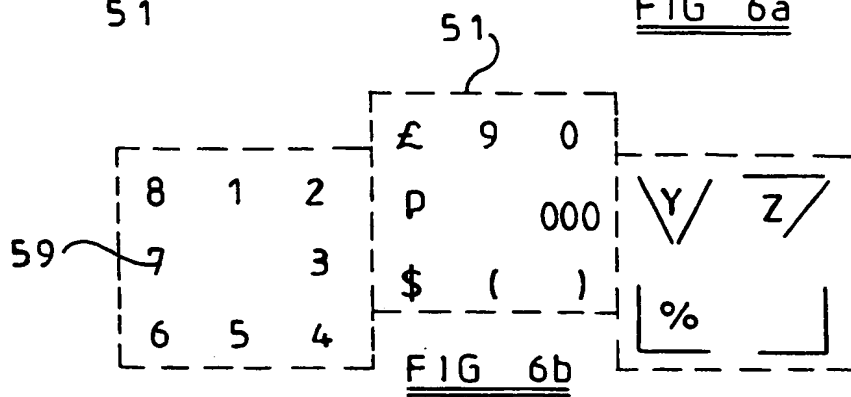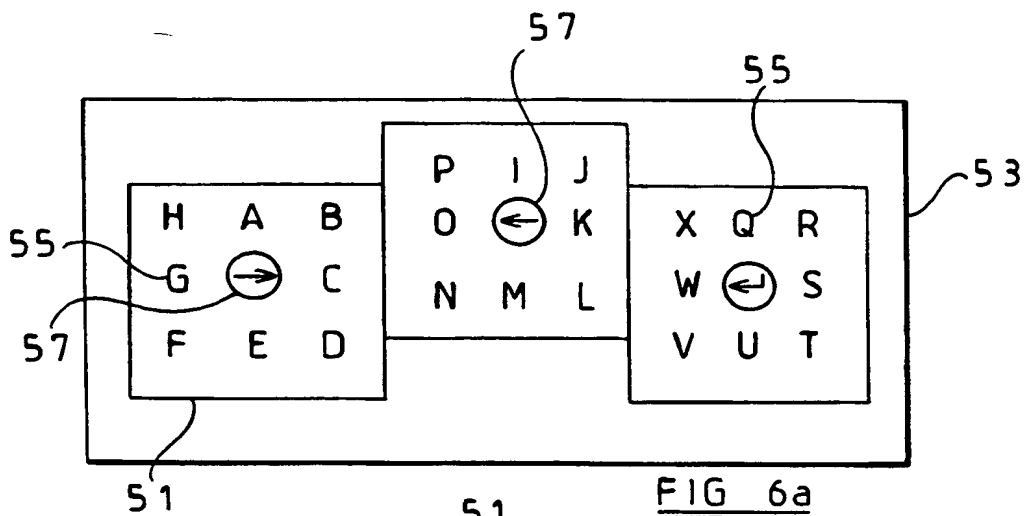




3 / 7

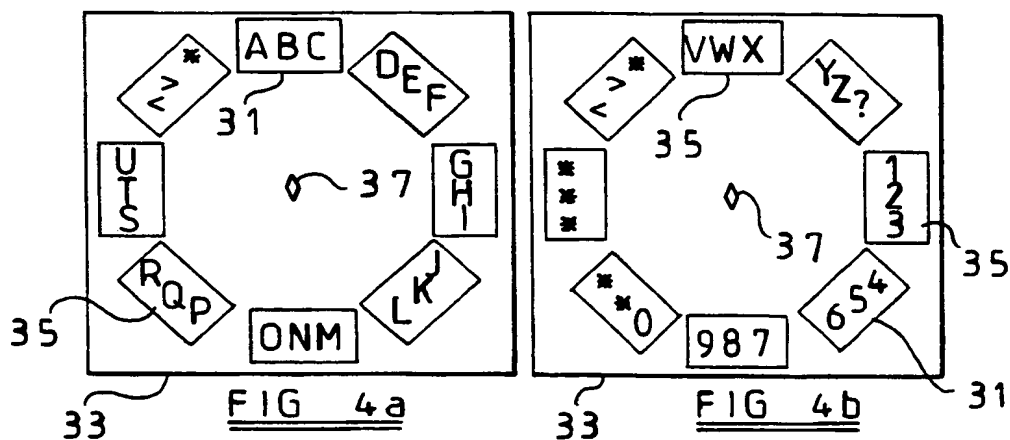




4 / 7

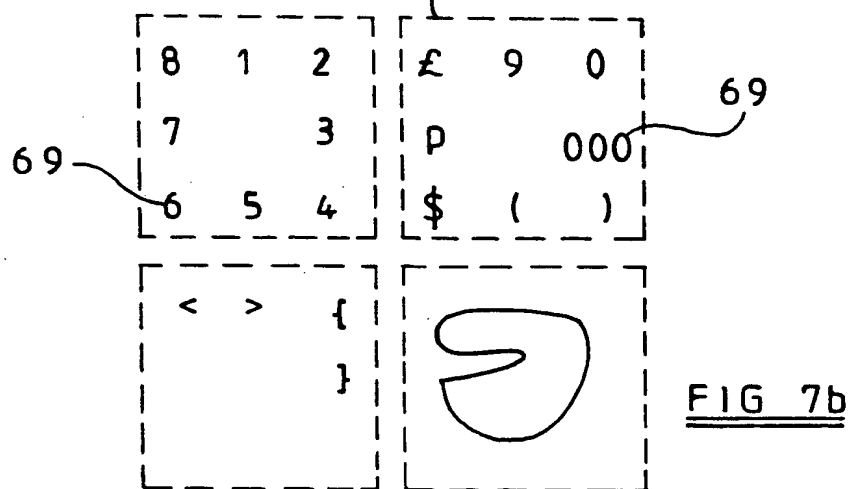
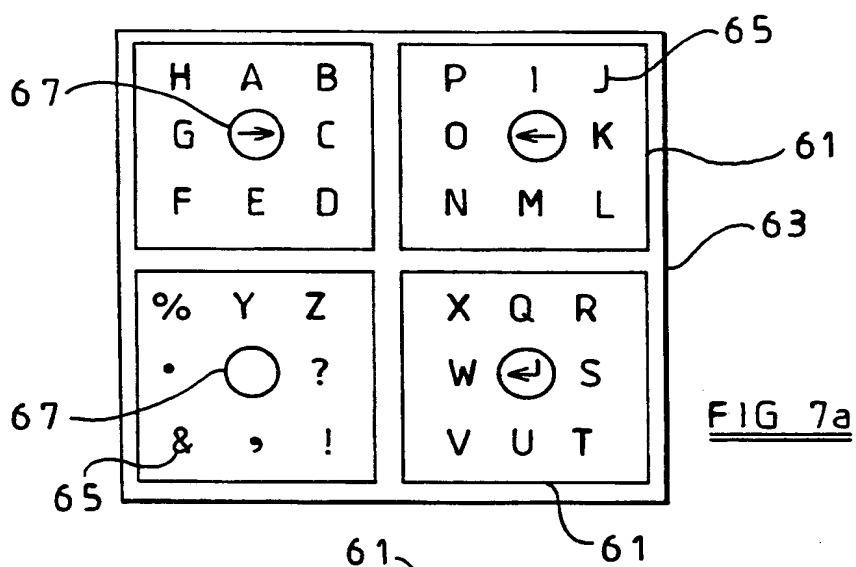
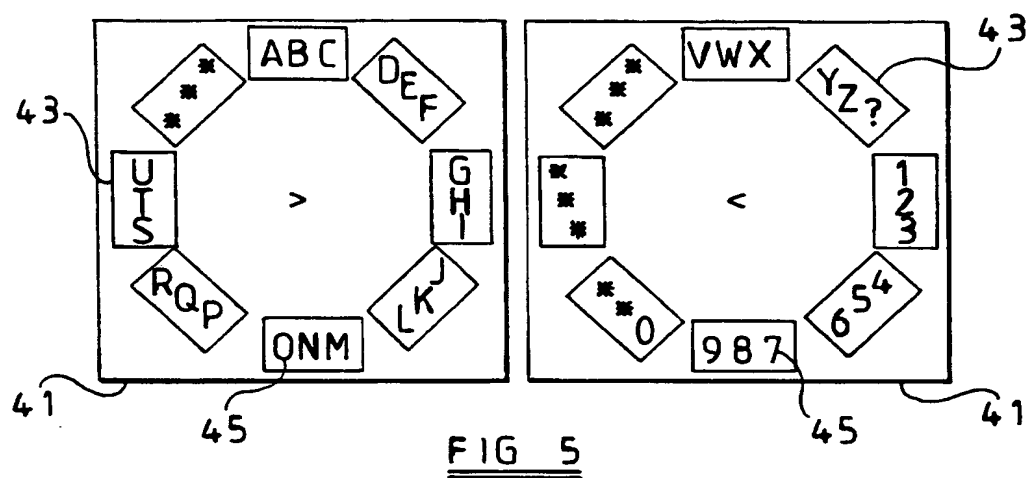


5 / 7

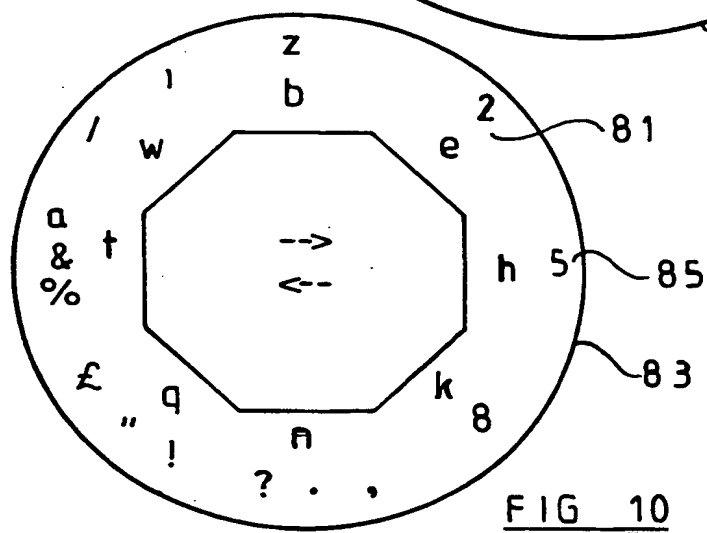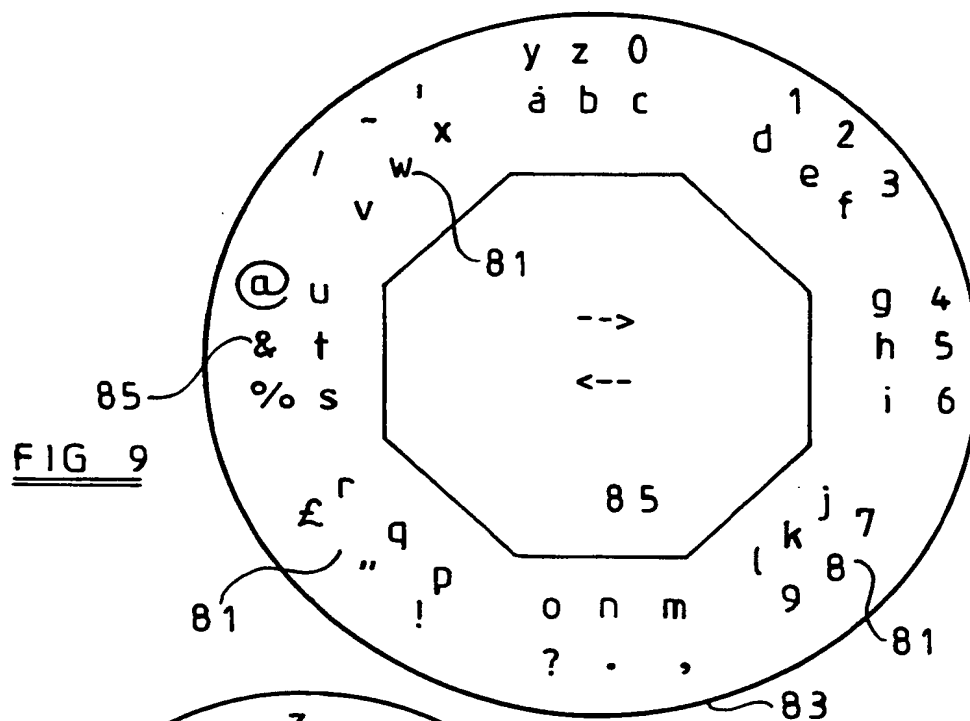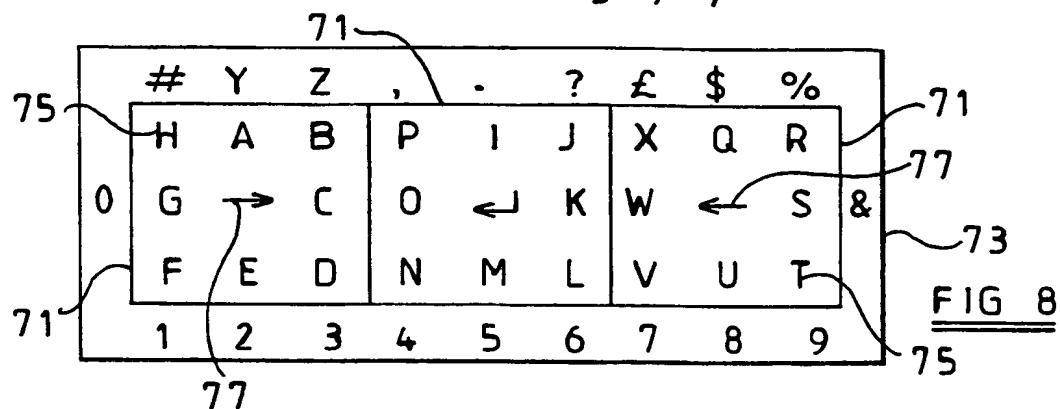

6 / 7

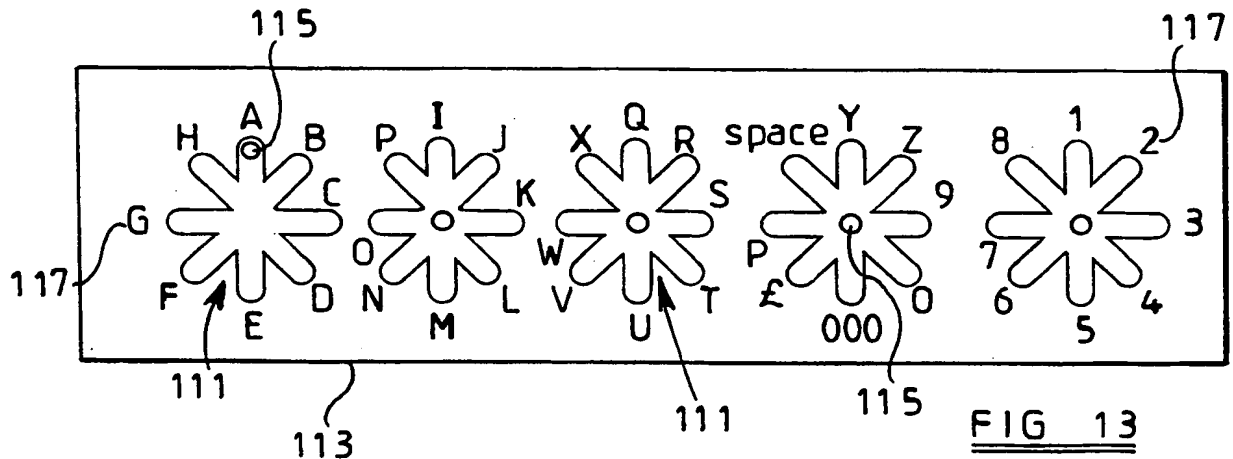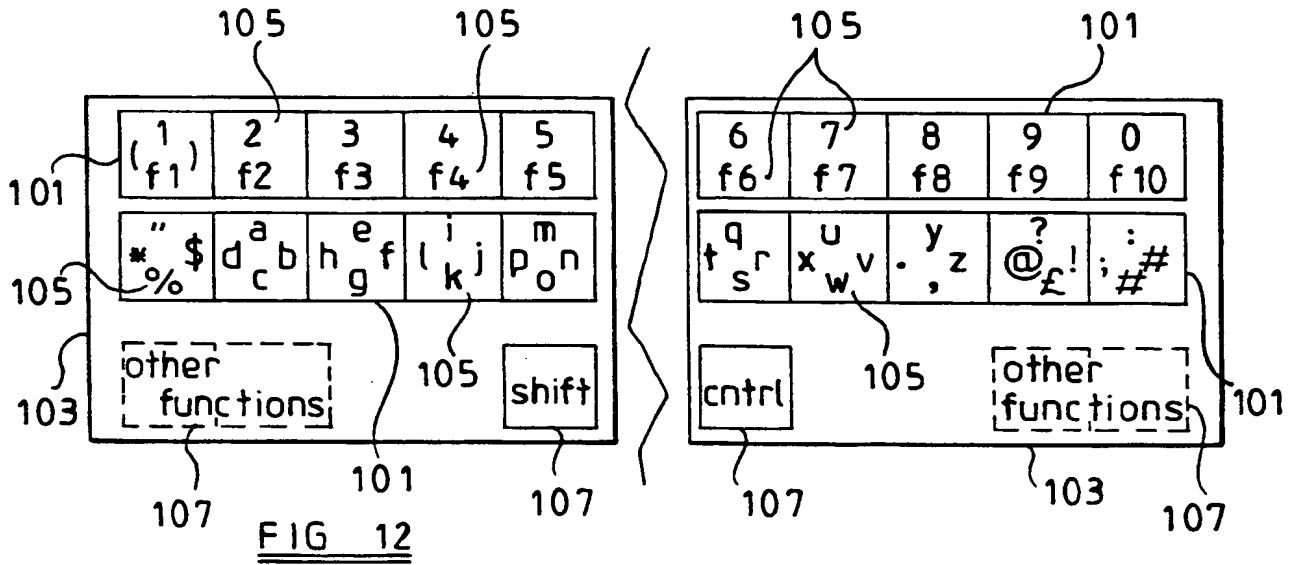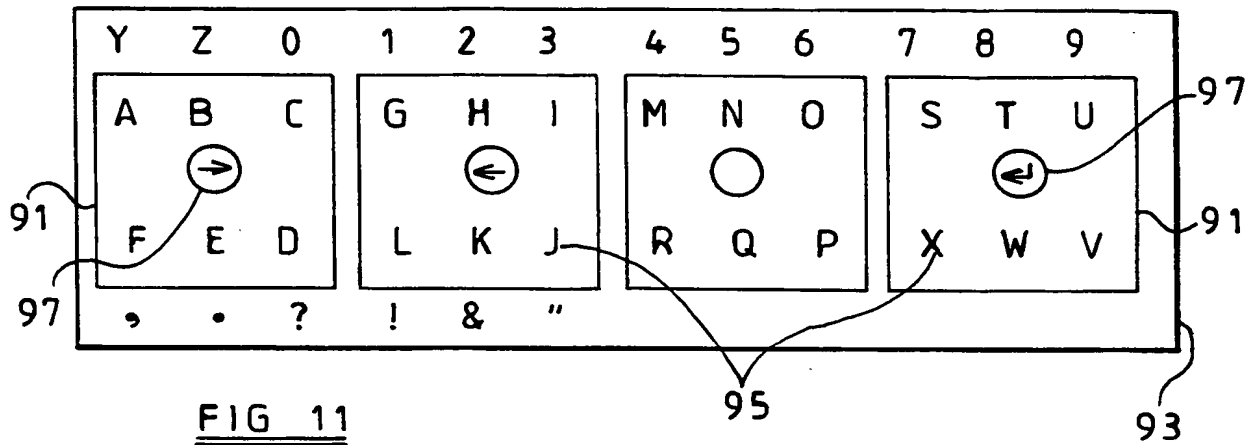

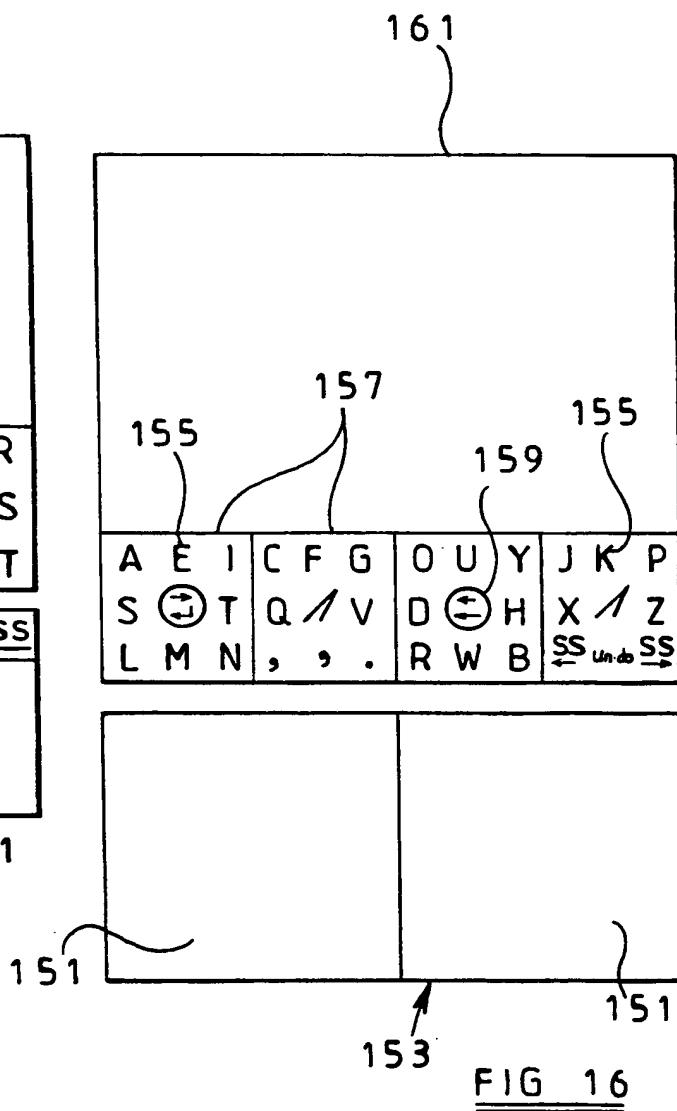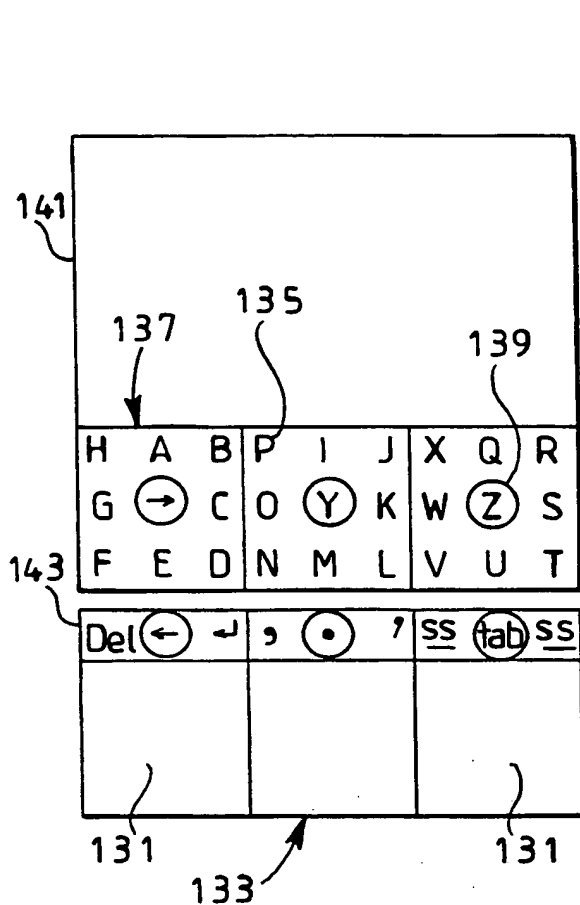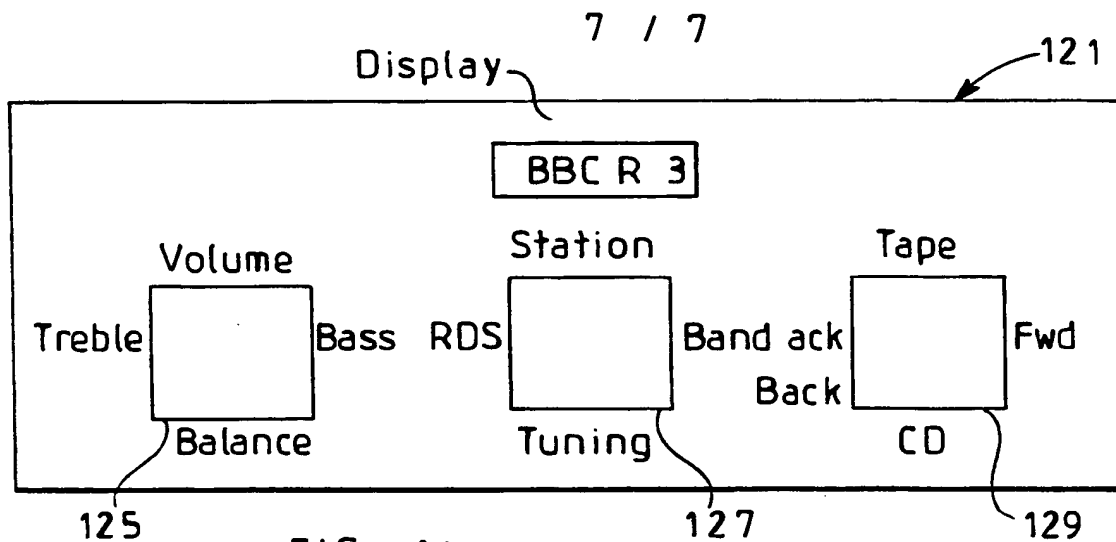

INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/GB 00/02243

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G06F3/023 G06F3/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 290 400 A (KAHN ET AL.) 20 December 1995 (1995-12-20)	1,3,4, 10,20, 22,29, 39,40
A	page 14, line 26 -page 16, line 5 abstract; figures 2-5,7	2,12,21, 23
X	EP 0 858 023 A (MICROSOFT) 12 August 1998 (1998-08-12)	1,20,22, 39,40
A	column 3, line 57 -column 6, line 28; figures 6-18	2-4,11, 21,23,30
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 2000

Date of mailing of the international search report

29/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Taylor, P

INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/GB 00/02243

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 008 847 A (LAPEYRE) 16 April 1991 (1991-04-16) column 3, line 36 -column 5, line 68; figures 1-5	39,40 1,3,10, 11,19, 20,22, 29,30,38
X A	US 5 786 809 A (RYZHOV ET AL.) 28 July 1998 (1998-07-28) column 5, line 29 - line 57; figures 2-4	39,40 1,10,20
A	WO 96 30822 A (FOREST) 3 October 1996 (1996-10-03) page 40, line 33 -page 44, line 3 page 67, line 1 - line 4 page 68, line 15 -page 69, line 14 page 89, line 27 -page 90, line 10; figures 17,18,34,39,54,55,57,64	1-3,12, 14,16, 20,39,40

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/GB 00/02243

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2290400	A	20-12-1995	CA 2126142 A US 5844544 A	18-12-1995 01-12-1998
EP 858023	A	12-08-1998	NONE	
US 5008847	A	16-04-1991	US 4547860 A CA 1300756 A EP 0294518 A JP 63311523 A US 5067103 A CA 1243096 A CA 1213067 A CA 1213987 A CA 1224737 C CA 1221465 C DE 3401941 A DE 3401942 A DE 3401976 A FR 2539894 A FR 2539895 A FR 2539896 A GB 2134293 A, B GB 2134042 A, B GB 2133745 A, B GB 2134294 A, B GB 2149946 A, B IT 1221794 B IT 1221795 B IT 1221796 B JP 59140548 A JP 59139467 A JP 59205635 A JP 59140547 A US 5383141 A US 4860234 A US 4999795 A US 4924431 A US 4910697 A US 4549279 A US 5062070 A US 5058046 A US 5105375 A US 5124940 A US 5184315 A US 5245559 A	15-10-1985 12-05-1992 14-12-1988 20-12-1988 19-11-1991 11-10-1988 21-10-1986 11-11-1986 28-07-1987 05-05-1987 26-07-1984 15-11-1984 26-07-1984 27-07-1984 27-07-1984 27-07-1984 08-08-1984 08-08-1984 01-08-1984 08-08-1984 19-06-1985 12-07-1990 12-07-1990 12-07-1990 11-08-1984 10-08-1984 21-11-1984 11-08-1984 17-01-1995 22-08-1989 12-03-1991 08-05-1990 20-03-1990 22-10-1985 29-10-1991 15-10-1991 14-04-1992 23-06-1992 02-02-1993 14-09-1993
US 5786809	A	28-07-1998	RU 2032212 C WO 9427241 A	27-03-1995 24-11-1994
WO 9630822	A	03-10-1996	AU 2191095 A DE 19581933 T GB 2314186 A, B GB 2331170 A, B GB 2332972 A, B	16-10-1996 16-04-1998 17-12-1997 12-05-1999 07-07-1999

- 1 OCT 2001

RECEIVED

PCT

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:

JACKSON, Derek C.
DEREK JACKSON ASSOCIATES
The Old Yard
Lower Town
Claines
Worcester WR3 7RY
GRANDE BRETAGNE

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL PRELIMINARY
EXAMINATION REPORT
(PCT Rule 71.1)

Date of mailing
(day/month/year) 28.09.2001

Applicant's or agent's file reference
P0434

IMPORTANT NOTIFICATION

International application No.
PCT/GB00/02243

International filing date (day/month/year)
09/06/2000

Priority date (day/month/year)
09/06/1999

Applicant
MALVERN SCIENTIFIC SOLUTIONS LIMITED et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/

 European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523656 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Muehlbauer, P

Tel. +49 89 2399-2513



PCT

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P0434	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/GB00/02243	International filing date (day/month/year) 09/06/2000	Priority date (day/month/year) 09/06/1999
International Patent Classification (IPC) or national classification and IPC G06F3/023		
Applicant MALVERN SCIENTIFIC SOLUTIONS LIMITED et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 7 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 5 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☒ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 03/01/2001	Date of completion of this report 28.09.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Rudolph, S Telephone No. +49 89 2399 7526 

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02243

I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

Description, pages:

9-29	as originally filed		
1-8	as received on	11/09/2001	with letter of 10/09/2001

Claims, No.:

1-38	as received on	11/09/2001	with letter of 10/09/2001
------	----------------	------------	---------------------------

Drawings, sheets:

1/7-7/7	as originally filed
---------	---------------------

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02243

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

- ☐ the entire international application.
- ☒ claims Nos. 2, 21.

because:

- ☐ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):
- ☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 2, 21 are so unclear that no meaningful opinion could be formed (*specify*):
see separate sheet
- ☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.
- ☐ no international search report has been established for the said claims Nos. .

2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

- ☐ the written form has not been furnished or does not comply with the standard.
- ☐ the computer readable form has not been furnished or does not comply with the standard.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02243

1. Statement

Novelty (N)	Yes:	Claims	1, 3-20, 22-38
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1, 3-20, 22-38
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1, 3-20, 22-38
	No:	Claims	

2. Citations and explanations **see separate sheet**

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/02243

Re Item III

Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

Refer to section VIII.2.

Re Item V

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

Reference is made to the following document:

- D1: GB-A-2 290 400 (KAHN ET AL.) 20 December 1995 (1995-12-20)
- D2: EP-A-0 858 023 (MICROSOFT) 12 August 1998 (1998-08-12)
- D3: US-A-5 008 847 (LAPEYRE) 16 April 1991 (1991-04-16)
- D4: US-A-5 786 809 (RYZHOV ET AL.) 28 July 1998 (1998-07-28)
- D5: WO 96 30822 A (FOREST) 3 October 1996 (1996-10-03)

As clarity objections are raised in relation with the present set of claims, the comments under section VIII of this examination report had been taken into account for the examination with regard to novelty, inventive step and industrial applicability.

1. Claim 1:

D5, which is considered as closest prior art, discloses a communication system comprising

- * means defining a communication region (page 40/line 33 - page 41/line 1),
- * having associated therewith a plurality of symbols or the like (page 40/line 33 - page 41/line 17),
- * being responsive to a user-controlled pointing device (page 41/lines 25-26, page 4/lines 30-34),
- * whereby a desired symbol or the like can be selected by detecting a movement of the pointing device along a predetermined bearing within a communication

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/02243

region (page 42/line 18, line 21, page 43/lines 5).

D5 does not disclose that

- a) said predetermined bearing is "substantially parallel" (refer to section VIII.1) to a direction of the desired symbol or the like relative to a central region of the communication region, and
- b) said predetermined bearing is not consisting of movement toward a selectable region associated with a desired symbol or the like.

D5 discloses several types of selection events (page 42/lines 18ff). The closest coming selection event of D5 is an intersection of a location indicated by a movement related signal and a selectable region (page 42/lines 21-22), i.e. the absolute location of the detected movement is taken into account for the determination which symbol is selected. In contrast thereto, according to present claim 1 of the international application, the detected direction of said movement is taken into account in order to select a symbol associated with a selectable region (location), irrespective of the absolute location of said detected movement.

This feature could neither be found nor be derived from any of the prior art documents (D1-D5) cited in the international search report. Thus, an inventive step in the sense of Article 33(3) PCT should be acknowledged.

2. Claim 20:

Independent claim 20 (as interpreted as stated under section VIII.1) discloses a method which corresponds to the apparatus of independent claim 1 which was found novel and inventive (see statements above). Thus, for the same reasons as already stated in relation with independent claim 1 also claim 20 meets the requirements of Articles 33(2) and (3) PCT concerning novelty and inventive step.

3. Claims 3-19 and 22-38:

Claims 3-19 and 22-38 depend on independent claims 1 or 20, respectively, which were found novel and inventive (see statements above). Consequently, also claims 3-19 and 22-38 meet the requirements of Articles 33(2) and (3) PCT concerning

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/02243

novelty and inventive step.

4. Industrial applicability:

Claims 1, 3-20 and 22-38 of the international application meet the requirements of Article 33(4) PCT concerning industrial applicability.

Re Item VIII

Certain observations on the international application

1. Claims 1 and 20:

Claims 1 and 20 lack clarity in the sense of Article 6 PCT as the term "substantially parallel" is ambiguous.

For the examination with regard to novelty and inventive step of this examination report this term is interpreted in the sense as defined on page 3, lines 33-37 of the description, i.e. in order to associate a movement with a selectable region said movement must be within a tolerance which can be determined by the angular separation of adjacent symbols.

2. Claims 2 and 21:

Claim 2 which depends on independent claim 1 discloses that a desired symbol could be selected by a circumferential movement which contradicts to the features defined in claim 1. Thus, claim 2 as well as corresponding method claim 21 are unclear in the sense of Article 6 PCT. An examination with regard to novelty, inventive step and industrial applicability cannot be carried out.

- 1 -

COMMUNICATION SYSTEM AND METHOD

This invention relates to a communication system and method of communicating which may be employed, for example, for the entry
5 of symbols such as text and/or other symbols by means other than a keyboard and/or for the entry of data, such as for controlling electronic equipment, and for the output of symbols and/or data.

10 The "QWERTY" keyboard is the most widely used symbol/text entry system. However, for certain applications its many keys, often over 100, occupy an inconveniently large area or, in the alternative, are inconveniently small for ready access by fingers or another pointing device. A mobile user can
15 additionally find the need for a horizontal support surface at a convenient height problematic.

Many other symbol/text entry systems have been developed, including some for single-handed use. None has acquired a
20 degree of popularity on the scale of the QWERTY keyboard. Some require the user to remember complex keystrokes or combinations of keystrokes which make them difficult to use. Such known symbol/text entry systems are particularly difficult for use by the casual user where a small number of relatively simple
25 movements is to be desired. Speed of symbol/text entry is important to both novice and skilled users.

GB-A-2 290 400 describes a visual communications apparatus which determines a user's selection by monitoring the eye
30 position to determine which of the characters is being observed.

There is known from EP-A-0 858 023 a symbol entry system and method in which a visible focus is responsive to commands given
35 by a user through a handheld remote command unit, so that the user can move the focus to a particular symbol in a symbol chart and select such a symbol for entry in a symbol entry region.

40 According to US-A-5 008 847 a conventional keyboard is replaced by a virtual keyboard on a computer screen, selection of

- 2 -

keystrokes being made by a mouse, or the like, positioning a cursor at a desired key for keyswitch operation.

There is known from US-A-5 786 809 a method of entry of
5 symbolic information into a computer system in which a set of symbols is positioned relative to an output position, a predetermined symbol being entered by moving a pointer to the predetermined symbol and selecting the symbol.

10 There is known from WO-A-96 30822 a method and apparatus for data entry incorporating a plurality of selectable regions. A menu option may be selected by clicking on an associated selectable region, by dwelling on it for a selection threshold period or by a cursor path toward the selectable region, or by
15 a combination thereof.

It is therefore an object of the present invention to provide a communication system and method which overcomes or at least reduces the disadvantages of known systems.

20

According to one aspect of the present invention there is provided a communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like (such as data items) and being
25 responsive to a user-controlled pointing device whereby a desired symbol or the like can be selected wherein a desired symbol or the like can be selected by detecting movement of the pointing device along a predetermined bearing within the communication region, the predetermined bearing being
30 substantially parallel to a direction of the desired symbol or the like relative to a central region of the communication region, but not consisting of movement toward a selectable region associated with a desired symbol or the like.

35 According to another aspect of the present invention there is provided a method of communication in which a plurality of symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device wherein a desired symbol or the like is
40 selected by detecting movement of the pointing device along a

- 3 -

predetermined bearing within the communication region, the predetermined bearing being substantially parallel to a direction of the desired symbol or the like relative to a central region of the communication region, but not consisting
5 of movement toward a selectable region associated with a desired symbol or the like.

Thus, movement of a single pointing device in the plane of the communication region can select any one of a number of symbols.

10

A plurality of symbol entry regions may be provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing
15 device in a predetermined direction (or bearing) within the region with which the desired symbol is associated.

The communication system may be in the form of a symbol entry system, such as for replacing a keyboard, or may be in the form
20 of a data entry system, such as for controlling one or more functions of electronic equipment.

Movement in a predetermined direction may be detected, for example, by analysing the direction (or bearing) of movement
25 of the pointing device rather than the location thereof. Thus, in practice the location of movement need not be restricted to an ideal direction in the form of a line from a central area of a region to a desired symbol, but rather may be generally parallel to the ideal direction. Such a method of analysis is
30 particularly beneficial in that it makes the system very tolerant of imprecision relating to the pointing device. Thus, the movement may be offset relative to the location of the symbol to be selected, or may have a variable length. Further the actual direction need not be precise, but may be within a
35 tolerance which can readily be determined by the angular separation of adjacent symbols (for example about ± 22.5 degrees for eight symbols disposed about a central point). Moreover, the movement need not be linear, curved movement being accommodated by determining an average direction, for
40 example using the start and finish points of a movement. Where

- 4 -

a plurality of cells are provided, the mid-point of a pointing movement may be used to determine the cell to be selected. Alternatively, movement in a predetermined direction may be detected, for example, by analysing the location at which the
5 movement intersects with a boundary of the region or other suitable boundary such as that of a touch-sensitive area.

In one embodiment of the invention there is a plurality of cells (for example, eight) within a single communication
10 (symbol entry or function entry) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being selected by movement in a predetermined direction relative to the respective cell
15 followed by continued movement in the same direction or movement at an angle thereto to select the desired symbol or the like associated with the respective cell. The cells may be provided substantially in an octagonal arrangement.

20 In another embodiment of the invention there is a plurality (for example, eight) communication (symbol entry or function entry) regions, each region having associated therewith a plurality of symbols (for example, four) or the like arranged in an orthogonal manner, a desired symbol or the like being
25 selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region. The eight regions may be provided substantially in an octagonal arrangement.

30

In a further embodiment of the invention there are four communication (symbol entry or function entry) regions, each region having associated therewith six or eight symbols or the like arranged in a predetermined manner, for example at the
35 corners of a square and substantially midway between predetermined adjacent corners, such as along the top and bottom of each region, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined
40 direction relative to the desired symbol or the like. The four

- 5 -

regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three
5 communication (symbol entry or function entry) regions, each
region having associated therewith eight symbols or the like
arranged in a predetermined manner, for example at the corners
of a square and substantially midway between adjacent corners,
a desired symbol or the like being selected by movement within
10 the region having the desired symbol or the like associated
therewith in a predetermined direction relative to the desired
symbol or the like. Where the three regions are intended to
be operated with a user's finger, the regions may be arranged
in a substantially linear manner with the central region
15 displaced so as to accommodate the user's middle finger length.

In a further embodiment of the invention there are two
communication (symbol entry or function entry) regions, each
region having associated therewith a plurality of symbols (for
20 example, eight) or the like arranged in a predetermined manner,
for example at the corners of a square and substantially midway
between adjacent corners, a desired symbol or the like being
selected by movement within the region having the desired
symbol or the like associated therewith in a predetermined
25 direction relative to the desired symbol or the like.

In a further embodiment of the invention there are five
communication (symbol entry or function entry) regions, each
region having associated therewith up to four symbols or the
30 like arranged in a predetermined manner, for example at the
corners of a square, a desired symbol or the like being
selected by movement within the region having the desired
symbol or the like associated therewith in a predetermined
direction relative to the desired symbol or the like. The
35 regions may arranged in a substantially linear manner. Two
sets of communication regions may be provided, one for each
hand. Alternatively, or additionally, two sets of
communication regions may be arranged substantially parallel
to each other for alternative symbol or the like entry.
40 Further communication regions may be provided if desired.

- 6 -

One or more further regions may be provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions. For example, a plurality of further regions may be provided around the periphery of the first-mentioned regions and/or a single further region may be provided centrally of the first-mentioned regions.

- 10 Means may be provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.
- 15 Means may be provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols. For example the speed of movement (slow or fast) or a combination of movements may be used. Combined movements may include a linear movement with
- 20 a dwell at the beginning and/or end thereof (for example to select upper case letters), a linear movement in a first direction followed by one or more further linear movements reversing the preceding movement, two sequential linear movements either at right-angles to each other or at another
- 25 predetermined angle to each other (for example to mimic all or part of the desired symbol or the like). It should be noted such different forms of movement do not constitute tracing out the symbol shape: only a small number of simple movements need to be remembered.

30

- The region or regions may be provided on a touch-sensitive pad or screen or may be displayed on a screen with symbols or the like being selected by way of a remote pointing device (such as a computer mouse or trackball or an optical tracking
- 35 device). The symbols may be provided on the region or regions, may be positioned adjacent (for example immediately above or below) thereto, or may be displayed on or adjacent the region or regions only if required by the user. Alternatively, the region or regions may be provided on sheet material in order

- 7 -

that a user can indicate each desired symbol or the like in turn.

According to a further aspect of the present invention there
5 is provided a communication (symbol output) system comprising means defining a communication (symbol output) region having associated therewith a plurality of symbols or the like, and means movable within the region whereby a desired symbol or the like can be indicated by movement of the movable means in a
10 predetermined direction or at a predetermined location within the region.

According to a further aspect of the present invention there is provided a method of communication (symbol output) in which
15 a plurality of symbols or the like are associated with a communication (symbol output) region and a desired symbol or the like is indicated by movement of a movable means in a predetermined direction or at a predetermined location within the region.

20

The movable means may comprise a visual means and/or a tactile means.

A plurality of symbol entry regions may be provided each having
25 associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.

30

A separate movable means may be provided for each region, for example a pin which is movable in orthogonal and/or diagonal directions. Alternatively, the movable means may be provided at each symbol or the like location, such as an extendable pin
35 or a piezo device.

In one embodiment of the invention there are eight communication (symbol output) regions, each region having associated therewith a plurality of symbols (for example, four)
40 or the like arranged in an orthogonal manner, a desired symbol

- 8 -

or the like being indicated by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction. The eight regions may be provided substantially in an octagonal arrangement.

In another embodiment of the invention there is a plurality of cells (for example, eight) within a single communication (symbol output) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being indicated by movement of the movable means in a predetermined direction relative to the respective cell followed by continued movement in the same direction in the same direction or movement at an angle thereto to indicate the desired symbol or the like within the respective cell. The eight cells may be provided substantially in an octagonal arrangement.

In a further embodiment of the invention there are four communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction. The four regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being indicated by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction.

Means may be provided for indicating further symbols or the like by employing a combination of movements of the movable

- 30 -

CLAIMS

1. A communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like and being responsive to a user-controlled pointing device whereby a desired symbol or the like can be selected characterised in that a desired symbol or the like can be selected by detecting movement of the pointing device along a predetermined bearing within the communication region, the predetermined bearing being substantially parallel to a direction of the desired symbol or the like relative to a central region of the communication region, but not consisting of movement toward a selectable region associated with a desired symbol or the like.

2. A communication system as claimed in claim 1, wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by movement towards the respective cell followed by further radial or circumferential movement to select the desired symbol or the like associated with the respective cell.

3. A communication system as claimed in claim 1, wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.

4. A communication system as claimed in claim 3, wherein there are eight communication regions, each region having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being

- 31 -

selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.

5 5. A communication system as claimed in claim 3, wherein
there are five communication regions, each region having
associated therewith a plurality of symbols or the like
arranged in a predetermined manner, a desired symbol or the
like being selected by movement within the region having
10 the desired symbol or the like associated therewith in a
predetermined direction relative to the desired symbol or
the like.

15 6. A communication system as claimed in claim 3, wherein
there are four communication regions, each region having
associated therewith a plurality of symbols or the like
arranged in a predetermined manner, a desired symbol or the
like being selected by movement within the region having
the desired symbol or the like associated therewith in a
20 predetermined direction relative to the desired symbol or
the like.

25 7. A communication system as claimed in claim 3, wherein
there are three communication regions, each region having
associated therewith a plurality of symbols or the like
arranged in a predetermined manner, a desired symbol or the
like being selected by movement within the region having
the desired symbol or the like associated therewith in a
predetermined direction relative to the desired symbol or
30 the like.

35 8. A communication system as claimed in claim 3, wherein
there are two communication regions, each region having
associated therewith a plurality of symbols or the like
arranged in a predetermined manner, a desired symbol or the
like being selected by movement within the region having
the desired symbol or the like associated therewith in a

- 32 -

predetermined direction relative to the desired symbol or the like.

5 9. A communication system as claimed in any preceding claim, wherein two sets of communication regions are provided.

10 10. A communication system as claimed in any preceding claim, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

15 11. A communication system as claimed in any preceding claim, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.

20 12. A communication system as claimed in any preceding claim, wherein means is provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols.

30 13. A communication system as claimed in claim 12, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

14. A communication system as claimed in claim 12 or 13, wherein the further symbols or the like may be selected on the basis of a combination of movements.

35 15. A communication system as claimed in claim 14, wherein the combination of movements comprise a curvilinear movement.

- 33 -

16. A communication system as claimed in claim 14 or 15, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

5 17. A communication system as claimed in claim 14, 15 or 16, wherein the combination of movements comprise a linear movement in a first direction followed by a further linear movements reversing the preceding movement.

10 18. A communication system as claimed in any one of claims 14 to 17, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

15 19. A communication system as claimed in any preceding claim, wherein the region or regions are provided on a touch-sensitive pad or screen.

20 20. A method of communication in which a plurality of symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device characterised in that a desired symbol or the like is selected by detecting movement of the pointing device along a predetermined bearing within the communication region, the predetermined bearing being substantially parallel to a direction of the desired symbol or the like relative to a central region of the communication region, but not consisting of movement toward a selectable region associated with a desired symbol or the like.

25

30

21. A method of communication according to claim 20, wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by movement towards the respective cell followed by further

35

- 34 -

radial or circumferential movement to select the desired symbol or the like associated with the respective cell.

5 22. A method of communication according to claim 20, wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within
10 the region with which the desired symbol is associated.

15 23. A method of communication according to claim 22, wherein there are eight communication regions, each region having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.

20 24. A method of communication according to claim 22, wherein there are five communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol
25 or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

30 25. A method of communication according to claim 22, wherein there are four communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol
35 or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

- 35 -

26. A method of communication according to claim 22, wherein there are three communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol
5 or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

10 27. A method of communication according to claim 22, wherein there are two communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol
15 or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

20 28. A method of communication according to any one of claims 20 to 27, wherein two sets of communication regions are provided.

25 29. A method of communication according to any one of claims 20 to 28, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

30 30. A method of communication according to any one of claims 20 to 29, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols
35 or the like of each region by tapping the area within the desired region.

- 36 -

31. A method of communication according to any one of claims 20 to 30, wherein further symbols or the like are selectable by employing a different form of movement from that required to select from the basic symbols.

5

32. A method of communication according to claim 31, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

10

33. A method of communication according to claim 31 or 32, wherein the further symbols or the like may be selected on the basis of a combination of movements.

15

34. A method of communication according to claim 33, wherein the combination of movements comprise a curvilinear movement.

20

35. A method of communication according to claim 33 or 34, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

25

36. A method of communication according to claim 33, 34 or 35, wherein the combination of movements comprise a linear movement in a first direction followed by a further linear movements reversing the preceding movement.

30

37. A method of communication according to any one of claims 33 to 36, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

38. A method of communication according to any one of claims 20 to 37, wherein the region or regions are provided on a touch-sensitive pad or screen.

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference P0434	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 00/ 02243	International filing date (day/month/year) 09/06/2000	(Earliest) Priority Date (day/month/year) 09/06/1999
Applicant MALVERN SCIENTIFIC SOLUTIONS LIMITED		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

16

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

PCT 00/02243

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F3/023 G06F3/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 290 400 A (KAHN ET AL.) 20 December 1995 (1995-12-20)	1,3,4, 10,20, 22,29, 39,40
A	page 14, line 26 -page 16, line 5 abstract; figures 2-5,7 ---	2,12,21, 23
X	EP 0 858 023 A (MICROSOFT) 12 August 1998 (1998-08-12)	1,20,22, 39,40
A	column 3, line 57 -column 6, line 28; figures 6-18 --- -/--	2-4,11, 21,23,30



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 2000

Date of mailing of the international search report

29/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Taylor, P

INTERNATIONAL SEARCH REPORT

International Application No

PC 00/02243

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 008 847 A (LAPEYRE) 16 April 1991 (1991-04-16) column 3, line 36 -column 5, line 68; figures 1-5 ---	39,40 1,3,10, 11,19, 20,22, 29,30,38
X A	US 5 786 809 A (RYZHOV ET AL.) 28 July 1998 (1998-07-28) column 5, line 29 - line 57; figures 2-4 ---	39,40 1,10,20
A	WO 96 30822 A (FOREST) 3 October 1996 (1996-10-03) page 40, line 33 -page 44, line 3 page 67, line 1 - line 4 page 68, line 15 -page 69, line 14 page 89, line 27 -page 90, line 10; figures 17,18,34,39,54,55,57,64 -----	1-3,12, 14,16, 20,39,40

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 00/02243

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
GB 2290400	A	20-12-1995	CA	2126142 A	18-12-1995
			US	5844544 A	01-12-1998

EP 858023	A	12-08-1998	NONE		

US 5008847	A	16-04-1991	US	4547860 A	15-10-1985
			CA	1300756 A	12-05-1992
			EP	0294518 A	14-12-1988
			JP	63311523 A	20-12-1988
			US	5067103 A	19-11-1991
			CA	1243096 A	11-10-1988
			CA	1213067 A	21-10-1986
			CA	1213987 A	11-11-1986
			CA	1224737 C	28-07-1987
			CA	1221465 C	05-05-1987
			DE	3401941 A	26-07-1984
			DE	3401942 A	15-11-1984
			DE	3401976 A	26-07-1984
			FR	2539894 A	27-07-1984
			FR	2539895 A	27-07-1984
			FR	2539896 A	27-07-1984
			GB	2134293 A, B	08-08-1984
			GB	2134042 A, B	08-08-1984
			GB	2133745 A, B	01-08-1984
			GB	2134294 A, B	08-08-1984
			GB	2149946 A, B	19-06-1985
			IT	1221794 B	12-07-1990
			IT	1221795 B	12-07-1990
			IT	1221796 B	12-07-1990
			JP	59140548 A	11-08-1984
			JP	59139467 A	10-08-1984
			JP	59205635 A	21-11-1984
			JP	59140547 A	11-08-1984
			US	5383141 A	17-01-1995
			US	4860234 A	22-08-1989
			US	4999795 A	12-03-1991
			US	4924431 A	08-05-1990
			US	4910697 A	20-03-1990
			US	4549279 A	22-10-1985
			US	5062070 A	29-10-1991
			US	5058046 A	15-10-1991
			US	5105375 A	14-04-1992
			US	5124940 A	23-06-1992
			US	5184315 A	02-02-1993
			US	5245559 A	14-09-1993

US 5786809	A	28-07-1998	RU	2032212 C	27-03-1995
			WO	9427241 A	24-11-1994

WO 9630822	A	03-10-1996	AU	2191095 A	16-10-1996
			DE	19581933 T	16-04-1998
			GB	2314186 A, B	17-12-1997
			GB	2331170 A, B	12-05-1999
			GB	2332972 A, B	07-07-1999

PATENT COOPERATION TREATY

PCT


NOTICE INFORMING THE APPLICANT OF THE COMMUNICATION OF THE INTERNATIONAL APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

From the INTERNATIONAL BUREAU

To:

JACKSON, Derek, Charles
Derek Jackson Associates
The Old Yard
Lower Town
Claines
Worcester WR3 7RY
ROYAUME-UNI

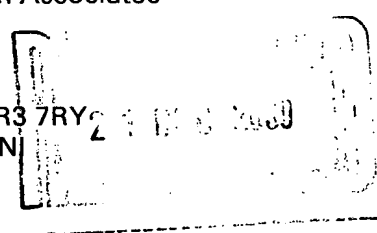

Date of mailing (day/month/year) 14 December 2000 (14.12.00)		IMPORTANT NOTICE	
Applicant's or agent's file reference P0434			
International application No. PCT/GB00/02243	International filing date (day/month/year) 09 June 2000 (09.06.00)	Priority date (day/month/year) 09 June 1999 (09.06.99)	
Applicant MALVERN SCIENTIFIC SOLUTIONS LIMITED et al			

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:
AG,AU,DZ,KP,KR,MZ,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

AE,AL,AM,AP,AT,AZ,BA,BB,BG,BR,BY,CA,CH,CN,CR,CU,CZ,DE,DK,DM,EA,EE,EP,ES,FI,GB,GD,
GE,GH,GM,HR,HU,ID,IL,IN,IS,JP,KE,KG,KZ,LC,LK,LR,LS,LT,LU,LV,MA,MD,MG,MK,MN,MW,MX,
NO,NZ,OA,PL,PT,RO,RU,SD,SE,SG,SI,SK,SL,TJ,TM,TR,TT,TZ,UA,UG,UZ,VN,YU,ZA,ZW

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 14 December 2000 (14.12.00) under No. WO 00/75765 .

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer J. Zahra
Facsimile No. (41-22) 740.14.35	Telephone No. (41-22) 338.83.38

REPLACED BY
ART 34 AND
WO 00/75765

09/980955
JC12 Rec'd PCT/PTO 04 DEC 2001
PCT/GB00/02243

7/ppts
- 1 -

COMMUNICATION SYSTEM AND METHOD

This invention relates to a communication system and method of communicating which may be employed, for example, for the entry of symbols such as text and/or other symbols by means other than a keyboard and/or for the entry of data, such as for controlling electronic equipment, and for the output of symbols and/or data.

The "QWERTY" keyboard is the most widely used symbol/text entry system. However, for certain applications its many keys, often over 100, occupy an inconveniently large area or, in the alternative, are inconveniently small for ready access by fingers or another pointing device. A mobile user can additionally find the need for a horizontal support surface at a convenient height problematic.

Many other symbol/text entry systems have been developed, including some for single-handed use. None has acquired a degree of popularity on the scale of the QWERTY keyboard. Some require the user to remember complex keystrokes or combinations of keystrokes which make them difficult to use. Such known symbol/text entry systems are particularly difficult for use by the casual user where a small number of relatively simple movements is to be desired. Speed of symbol/text entry is important to both novice and skilled users.

It is therefore an object of the present invention to provide a communication system and method which overcomes or at least reduces the disadvantages of known systems.

According to one aspect of the present invention there is provided a communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like (such as data items) and being responsive to a user-controlled pointing device

- 2 -

whereby a desired symbol or the like can be selected by movement of the pointing device in a predetermined direction within the region.

5 According to another aspect of the present invention there is provided a method of communication in which a plurality of symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device in a predetermined direction
10 within the region.

Thus, movement of a single pointing device in the plane of the communication region can select any one of a number of symbols.

15 A plurality of symbol entry regions may be provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction (or bearing)
20 within the region with which the desired symbol is associated.

The communication system may be in the form of a symbol entry system, such as for replacing a keyboard, or may be
25 in the form of a data entry system, such as for controlling one or more functions of electronic equipment.

An ideal direction of movement is a line from a central area of a region to a desired symbol. Movement in a predetermined direction may be detected, for example, by analysing the direction (or bearing) of movement of the pointing device rather than the location thereof. Thus, in practice the location of movement need not be restricted to
30 the ideal direction, but rather may be generally parallel to the ideal direction. Such a method of analysis is particularly beneficial in that it makes the system very
35

- 3 -

tolerant of imprecision relating to the pointing device. Thus, the movement may be offset relative to the location of the symbol to be selected, or may have a variable length. Further the actual direction need not be precise, but may be within a tolerance which can readily be determined by the angular separation of adjacent symbols (for example about ± 22.5 degrees for eight symbols disposed about a central point). Moreover, the movement need not be linear, curved movement being accommodated by determining an average direction, for example using the start and finish points of a movement. Where a plurality of cells are provided, the mid-point of a pointing movement may be used to determine the cell to be selected. Alternatively, movement in a predetermined direction may be detected, for example, by analysing the location at which the movement intersects with a boundary of the region or other suitable boundary such as that of a touch-sensitive area.33

In one embodiment of the invention there is a plurality of cells (for example, eight) within a single communication (symbol entry or function entry) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being selected by movement in a predetermined direction relative to the respective cell followed by continued movement in the same direction or movement at an angle thereto to select the desired symbol or the like associated with the respective cell. The cells may be provided substantially in an octagonal arrangement.

In another embodiment of the invention there is a plurality (for example, eight) communication (symbol entry or function entry) regions, each region having associated therewith a plurality of symbols (for example, four) or the like arranged in an orthogonal manner, a desired symbol or

- 4 -

the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region. The eight regions may be provided substantially in an octagonal arrangement.

In a further embodiment of the invention there are four communication (symbol entry or function entry) regions, each region having associated therewith six or eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between predetermined adjacent corners, such as along the top and bottom of each region, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. The four regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three communication (symbol entry or function entry) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. Where the three regions are intended to be operated with a user's finger, the regions may be arranged in a substantially linear manner with the central region displaced so as to accommodate the user's middle finger length.

In a further embodiment of the invention there are two communication (symbol entry or function entry) regions,

- 5 -

each region having associated therewith a plurality of symbols (for example, eight) or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

In a further embodiment of the invention there are five communication (symbol entry or function entry) regions, each region having associated therewith up to four symbols or the like arranged in a predetermined manner, for example at the corners of a square, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like. The regions may be arranged in a substantially linear manner. Two sets of communication regions may be provided, one for each hand. Alternatively, or additionally, two sets of communication regions may be arranged substantially parallel to each other for alternative symbol or the like entry. Further communication regions may be provided if desired.

One or more further regions may be provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions. For example, a plurality of further regions may be provided around the periphery of the first-mentioned regions and/or a single further region may be provided centrally of the first-mentioned regions.

Means may be provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to

- 6 -

the first-mentioned symbols or the like of each region by tapping the area within the desired region.

Means may be provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols. For example the speed of movement (slow or fast) or a combination of movements may be used. Combined movements may include a linear movement with a dwell at the beginning and/or end thereof (for example to select upper case letters), a linear movement in a first direction followed by one or more further linear movements reversing the preceding movement, two sequential linear movements either at right-angles to each other or at another predetermined angle to each other (for example to mimic all or part of the desired symbol or the like). It should be noted such different forms of movement do not constitute tracing out the symbol shape: only a small number of simple movements need to be remembered.

The region or regions may be provided on a touch-sensitive pad or screen or may be displayed on a screen with symbols or the like being selected by way of a remote pointing device (such as a computer mouse or trackball or an optical tracking device). The symbols may be provided on the region or regions, may be positioned adjacent (for example immediately above or below) thereto, or may be displayed on or adjacent the region or regions only if required by the user. Alternatively, the region or regions may be provided on sheet material in order that a user can indicate each desired symbol or the like in turn.

According to a further aspect of the present invention there is provided a communication (symbol output) system comprising means defining a communication (symbol output) region having associated therewith a plurality of symbols or the like, and means movable within the region whereby a

- 7 -

desired symbol or the like can be indicated by movement of the movable means in a predetermined direction or at a predetermined location within the region.

5 According to a further aspect of the present invention there is provided a method of communication (symbol output) in which a plurality of symbols or the like are associated with a communication (symbol output) region and a desired
10 symbol or the like is indicated by movement of a movable means in a predetermined direction or at a predetermined location within the region.

The movable means may comprise a visual means and/or a tactile means.

15

A plurality of symbol entry regions may be provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the
20 pointing device in a predetermined direction within the region with which the desired symbol is associated.

A separate movable means may be provided for each region, for example a pin which is movable in orthogonal and/or
25 diagonal directions. Alternatively, the movable means may be provided at each symbol or the like location, such as an extendable pin or a piezo device.

In one embodiment of the invention there are eight
30 communication (symbol output) regions, each region having associated therewith a plurality of symbols (for example, four) or the like arranged in an orthogonal manner, a desired symbol or the like being indicated by movement of the movable means within the region having the desired
35 symbol or the like associated therewith in a predetermined orthogonal direction. The eight regions may be provided substantially in an octagonal arrangement.

- 8 -

In another embodiment of the invention there is a plurality of cells (for example, eight) within a single communication (symbol output) region, each cell having associated therewith a plurality of symbols (for example, three) or the like arranged in a linear manner, a desired symbol or the like being indicated by movement of the movable means in a predetermined direction relative to the respective cell followed by continued movement in the same direction in the same direction or movement at an angle thereto to indicate the desired symbol or the like within the respective cell. The eight cells may be provided substantially in an octagonal arrangement.

In a further embodiment of the invention there are four communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being selected by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction. The four regions may be provided substantially in a quadrilateral arrangement or substantially in a linear arrangement.

In a further embodiment of the invention there are three communication (symbol output) regions, each region having associated therewith eight symbols or the like arranged in a predetermined manner, for example at the corners of a square and substantially midway between adjacent corners, a desired symbol or the like being indicated by movement of the movable means within the region having the desired symbol or the like associated therewith in a predetermined direction.

Means may be provided for indicating further symbols or the like by employing a combination of movements of the movable

- 30 -

CLAIMS

1. A communication system comprising means defining a communication region having associated therewith a plurality of symbols or the like and being responsive to a user-controlled pointing device whereby a desired symbol or the like can be selected by movement of the pointing device in a predetermined direction within the region.
2. A communication system as claimed in claim 1, wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by movement towards the respective cell followed by further radial or circumferential movement to select the desired symbol or the like associated with the respective cell.
3. A communication system as claimed in claim 1, wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.
4. A communication system as claimed in claim 3, wherein there are eight communication regions, each region having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.
5. A communication system as claimed in claim 3, wherein there are five communication regions, each region having associated therewith a plurality of symbols or the like

- 31 -

arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

6. A communication system as claimed in claim 3, wherein there are four communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

7. A communication system as claimed in claim 3, wherein there are three communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

8. A communication system as claimed in claim 3, wherein there are two communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

9. A communication system as claimed in any preceding claim, wherein two sets of communication regions are provided.

- 32 -

10. A communication system as claimed in any preceding claim, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

11. A communication system as claimed in any preceding claim, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.

12. A communication system as claimed in any preceding claim, wherein means is provided for selecting further symbols or the like by employing a different form of movement from that required to select from the basic symbols.

13. A communication system as claimed in claim 12, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

14. A communication system as claimed in claim 12 or 13, wherein the further symbols or the like may be selected on the basis of a combination of movements.

15. A communication system as claimed in claim 14, wherein the combination of movements comprise a curvilinear movement.

16. A communication system as claimed in claim 14 or 15, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

17. A communication system as claimed in claim 14, 15 or 16, wherein the combination of movements comprise a linear

- 33 -

movement in a first direction followed by a further linear movements reversing the preceding movement.

18. A communication system as claimed in any one of claims 5 14 to 17, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

19. A communication system as claimed in any preceding 10 claim, wherein the region or regions are provided on a touch-sensitive pad or screen.

20. A method of communication in which a plurality of 15 symbols or the like are associated with a communication region and a desired symbol or the like is selected by movement of a pointing device in a predetermined direction within the region.

21. A method of communication according to claim 20, 20 wherein there is a plurality of cells within a single communication region, each cell having associated therewith a plurality of symbols or the like arranged in a linear manner, a desired symbol or the like being selected by 25 movement towards the respective cell followed by further radial or circumferential movement to select the desired symbol or the like associated with the respective cell.

22. A method of communication according to claim 20, 30 wherein a plurality of symbol entry regions are provided each having associated therewith a plurality of symbols and each being responsive to the user-controlled pointing device whereby a desired symbol can be selected by movement of the pointing device in a predetermined direction within the region with which the desired symbol is associated.

23. A method of communication according to claim 22, 35 wherein there are eight communication regions, each region

- 34 -

having associated therewith four symbols or the like arranged in an orthogonal manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined orthogonal direction relative to the desired region.

24. A method of communication according to claim 22, wherein there are five communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

25. A method of communication according to claim 22, wherein there are four communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

26. A method of communication according to claim 22, wherein there are three communication regions, each region having associated therewith a plurality of symbols or the like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

27. A method of communication according to claim 22, wherein there are two communication regions, each region having associated therewith a plurality of symbols or the

- 35 -

like arranged in a predetermined manner, a desired symbol or the like being selected by movement within the region having the desired symbol or the like associated therewith in a predetermined direction relative to the desired symbol or the like.

28. A method of communication according to any one of claims 20 to 27, wherein two sets of communication regions are provided.

29. A method of communication according to any one of claims 20 to 28, wherein at least one further region is provided separated from the first-mentioned regions for toggling between the first-mentioned set of symbols or the like and one or more further sets of symbols or the like to be associated with each of the regions.

30. A method of communication according to any one of claims 20 to 29, wherein means is provided for selecting a further symbol or the like arranged within an area encompassed by or adjacent to the first-mentioned symbols or the like of each region by tapping the area within the desired region.

31. A method of communication according to any one of claims 20 to 30, wherein further symbols or the like are selectable by employing a different form of movement from that required to select from the basic symbols.

32. A method of communication according to claim 31, wherein the further symbols or the like may be selected on the basis of the speed of movement of the pointing device.

33. A method of communication according to claim 31 or 32, wherein the further symbols or the like may be selected on the basis of a combination of movements.

- 36 -

34. A method of communication according to claim 33, wherein the combination of movements comprise a curvilinear movement.

5 35. A method of communication according to claim 33 or 34, wherein the combination of movements comprise a linear movement with a dwell at the beginning and/or end thereof.

10 36. A method of communication according to claim 33, 34 or 35, wherein the combination of movements comprise a linear movement in a first direction followed by a further linear movements reversing the preceding movement.

15 37. A method of communication according to any one of claims 33 to 36, wherein the combination of movements comprise two sequential linear movements either at a predetermined angle to each other.

20 38. A method of communication according to any one of claims 20 to 37, wherein the region or regions are provided on a touch-sensitive pad or screen.

25 39. A communication (symbol output) system comprising means defining a communication (symbol output) region having associated therewith a plurality of symbols or the like, and means movable within the region whereby a desired symbol or the like can be indicated by movement of the movable means in a predetermined direction or at a predetermined location within the region.

30 40. A method of communication (symbol output) in which a plurality of symbols or the like are associated with a communication (symbol output) region and a desired symbol or the like is indicated by movement of a movable means in
35 a predetermined direction or at a predetermined location within the region.